

GROB-FLUGZEUGBAU  
8939 Mattsies  
Flugplatz Mindelheim-Mattsies  
Telefon 08268/411

# FLIGHT HANDBOOK

## **TWIN-ASTIR**

This handbook must be carried on board at all times.

It refers to the TWIN ASTIR Sailplane

Registration:

Factory Serial Number:

Owner:

---


---

---

German edition of operating instructions are approved under § 12/2.  
of LuftGerPO.

Published May 1978

Approval of translation has been done by best knowledge and judgement — In any case the  
original text in German language is authoritative.

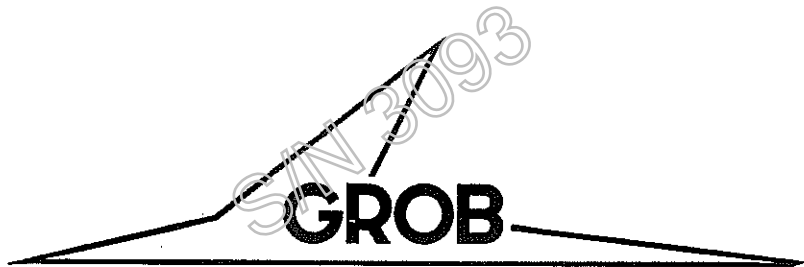

GROB-FLUGZEUGBAU  
8939 Mattsies  
Flugplatz Mindelheim-Mattsies  
Telefon 08268/411

# FLIGHT HANDBOOK

## *TWIN-ASTIR*

### TRAINER

This handbook must be carried on board at all times.

It refers to the TWIN-ASTIR TRAINER Sailplane

Registration:

Factory Serial Number:

Owner:

---

---



---

German edition of operating instructions are approved under § 12/2. of LuftGerPO.

Published May 1978

Approval of translation has been done by best knowledge and judgement — In any case the original text in German language is authoritative.


Updates



Current number	Page	Reference	Date	Signature	LBA - Approval
1	5a	TWIN ASTIR TRAINER	1.4.78		
2	17	New Control Levers	1.10.78		
3	18	New Control Levers	1.10.78		
4	25	Check of wing	1.10.78		
5	25a	Fittings	1.10.78		
6	1, 28	Service Bulletin 315-50	28.09.92		
7	1, 25, 25a	TM 315-58	04.11.96		
8	1, 7, 11	ASB 315-64 Envelope Limitations	30.06.2003		
9	1, 7, 11	MSB 315-64/3 Revised Limits of Operation	14.09.2004		12. Okt. 2004 

**Contents**


I.	General	
I. 1	Updates	1
I. 2	Contents	2
I. 3	Photograph	4
I. 4	Drawing	5
I. 5	Description	6
II.	Operating limits	
II. 1	Airworthiness Group	6
II. 2	Permitted operating conditions	6
II. 3	Minimum equipment	6
II. 4	Maximum Speeds	7
II. 5	Flight envelope	7
II. 6	Weight limits	8
II. 7	Centre of gravity position	8
II. 8	Load scheme	8
II. 9	Tow hooks	10
II. 10	Weak link strength	10
II. 11	Tire pressure	10
II. 12	Crosswinds	10
II. 13	Required placards	11
II. 14	Symbols	13
III.	Emergency procedures	
III. 1	Exit from a spin	15
III. 2	Emergency canopy jettisoning and exit	15
III. 3	Landing with a retracted undercarriage	15
III. 4	Others (Rain, ice, stall, groundloops)	15
III. 5	Instruments specifications	16

IV.	Normal operation	
IV. 1	Cockpit and controls (Picture)	17
IV. 2	Daily preflight inspection	19
IV. 3	Control checks before take off	21
IV. 4	Take off	21
IV. 5	Free Flight	22
IV. 6	Slow flying and stalls	22
IV. 7	High speed flight	22
IV. 8	Cloud flying	22
IV. 9	Simple Aerobatics	23
IV. 10	Approach and landing	24
IV. 11	Flying with waterballast	24
V.	Rigging and derigging	
V. 1	Rigging, derigging	25
V. 2	Storage	26
V. 3	Transport	27
V. 4	Maintenance of the glider	27
VI.	Appendices	
VI. 1	Flight performance	29
VI. 2	Service and Maintenance instructions	30
VI. 3	Reference to repairs	31
VI. 4	Reference to release hooks	31
VI. 5	Determination of the center of gravity	31

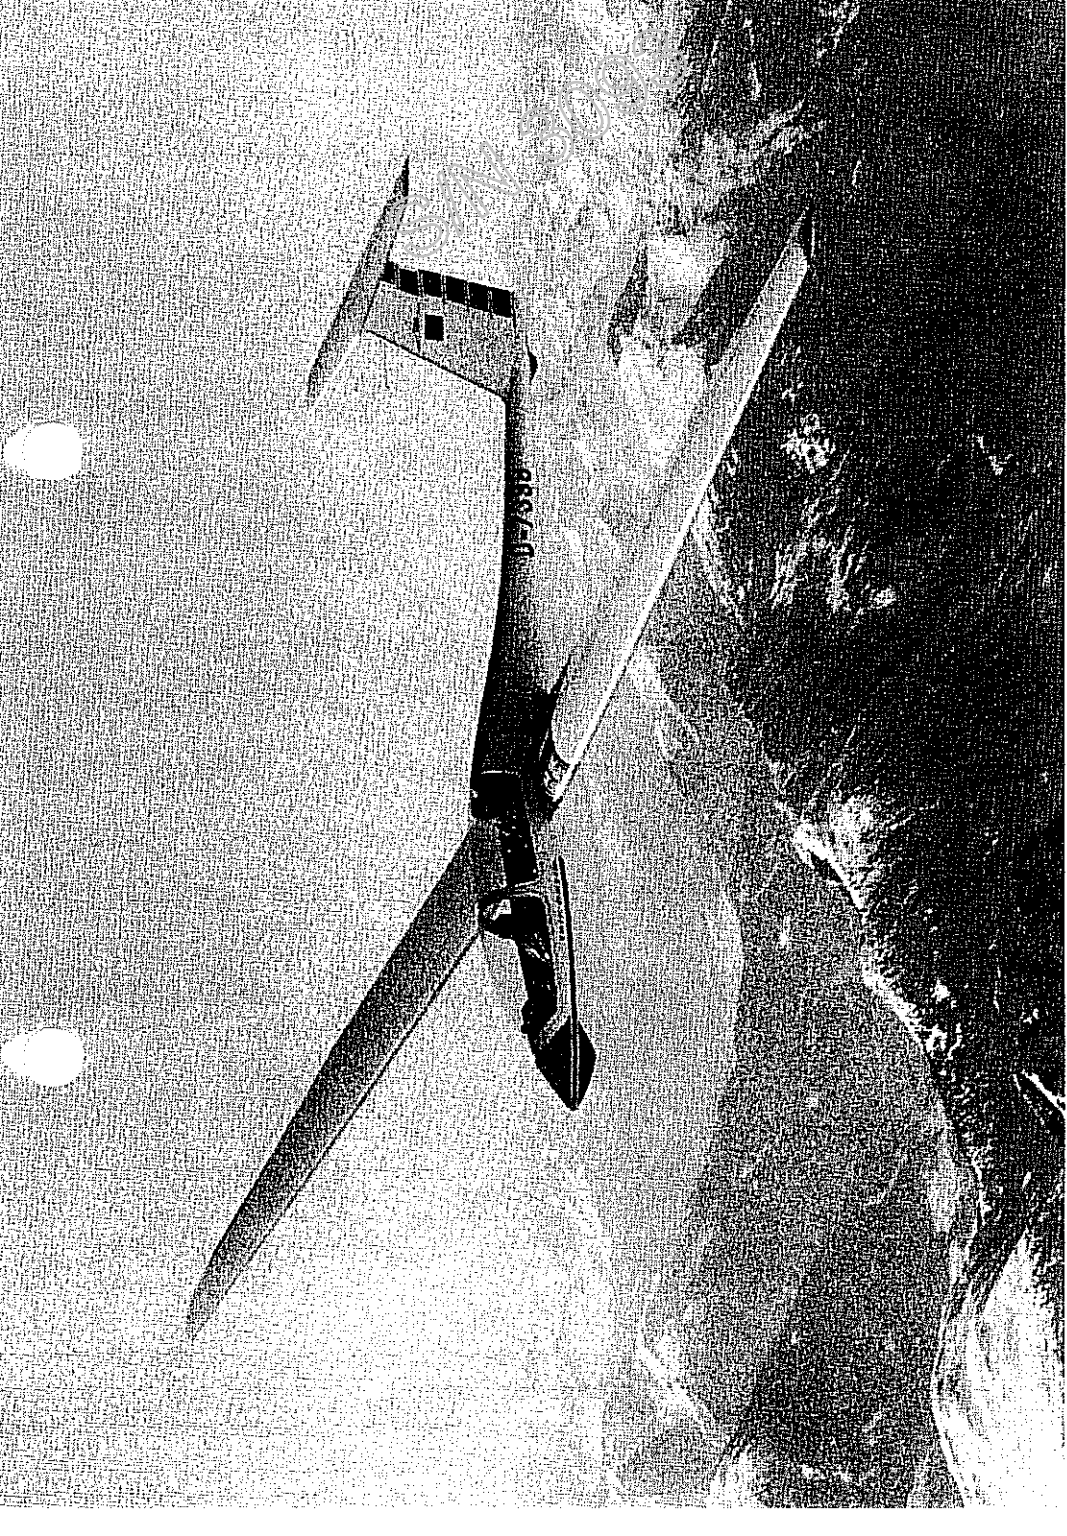

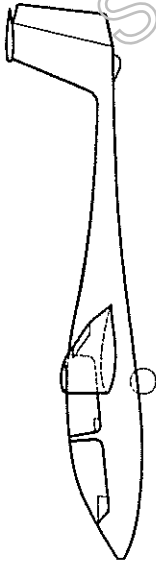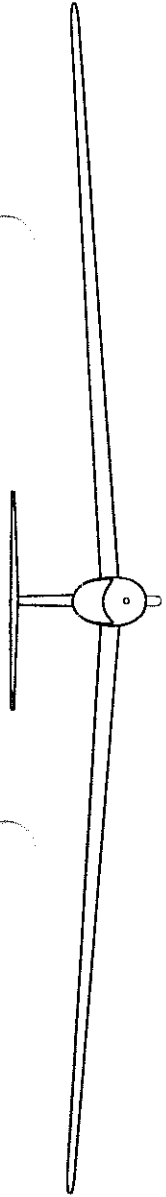

TWIN ASTIR  
GROB FLUGZEUGBAU  
MINDELHEIM

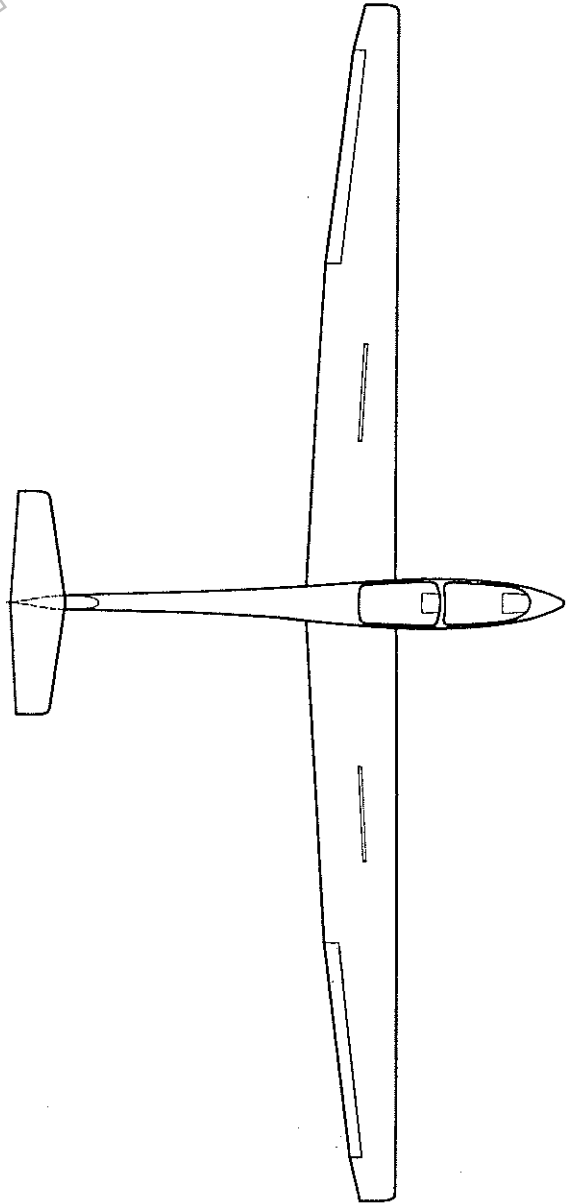

The sailplane TWIN-ASTIR TRAINER is derived from the TWIN-ASTIR. The differences are fixed sprung undercarriage with disc brake, and the deletion of the wing ballast tanks.

Therefore, the remarks in the flight handbook and the maintenance handbook concerning retractable undercarriage and water tanks do not apply to the TWIN-ASTIR TRAINER.

The wheel brake of the TWIN-ASTIR TRAINER is a disc brake. The brake cylinder with the storage tank for brake fluid is mounted on the undercarriage box.

The marks for minimum and maximum reserve must be observed. For refilling use brake fluid DOT 3 (amber).



## I. 5 Description

The TWIN ASTIR is a high performance two seater sailplane with a T-tail, fitted with a retractable undercarriage, upper surface airbrakes and water ballast tanks in the wings.

This sailplane is manufactured using the latest techniques in industrial Glass fibre construction.

It is designed for training, high performance and simple aerobatic flying.

### Technical Data:

Span	17.5 m (57.4 ft.)	Wing Area	17.8 m <sup>2</sup> (191.6 ft. <sup>2</sup> )
Length	8.1 m (26.6 ft.)		
Height	1.6 m (5.2 ft.)	Maximum Flying Weight	650 kg (1435 lbs)
Aspect			
Ratio	17.1	Maximum Wing Loading	36.5 kg/m <sup>2</sup> (7.84 lbs/ft. <sup>2</sup> )

## II. Operating Limits

### II. 1 Airworthiness Group

(U, Utility, LFSM)

The LFSM (Lufttüchtigkeitsforderung für Segelflugzeuge und Motorsegler) published 23. 10. 1975 are the basic rules and requirements for the licensing of a new type of glider or motor glider in Germany.

### II. 2 Permitted operating conditions.

The plane is licensed for:

1. Flight in VMC
2. Simple Aerobatics (Loops, Stall turns, Lazy eight, Chandelle and Spin).
3. Cloud flying (When fitted with suitable instrumentation as defined in section II. 3).

### II. 3 Minimum equipment

1. 2 Air speed Indicators reading to 300 km/hr (162 kts, 187 mph)
2. 2 Altimeters.
3. Full Harness Straps in front and back cockpit.
4. Parachute or back cushion at least 7 cm (3 inch) thick.
5. Loading limit plaque in front and back cockpit.
6. Flight Limits plaque.
7. Flight Handbook.

**Cloud Flying.**

For cloud flying the additional instruments listed below must be installed.

1. Variometer.
2. Electric turn and slip indicator.
3. Magnetic Compass (Compensated inside the glider).

**II. 4 Maximum Speeds**

Maximum permitted speed in calm air . . . . .	$V_{NE} = 250 \text{ km/h ( 135 kts, 155 mph )}$
Maximum permitted speed in rough air . . . . .	$V_B = 170 \text{ km/h ( 92 kts, 105 mph )}$
Maximum Manoeuvring speed	$V_M = 170 \text{ km/h ( 92 kts, 105 mph )}$
Maximum winch launch speed	$V_W = 120 \text{ km/h ( 65 kts, 74 mph )}$
Maximum Aerotow speed . . . . .	$V_T = 170 \text{ km/h ( 92 kts, 105 mph )}$

Conditions in rough air are similar to those encountered in rotors, clouds, whirlwinds and when overflying mountain ranges.

Manoeuvring speed is the maximum speed at which full control deflections may be used. At maximum speed ( $V_{NE}$ ) the control deflections should be restricted to 1/3 of the full range.

Air speed indicator markings

51–105 mph = 44 — 92 kts = 82 — 170 km/h	— Green arc
105–155 mph = 92 — 135 kts = 170 — 250 km/h	— Yellow arc
at 155 mph = 135 kts = 250 km/h ( <del>MSB315-64/3</del> )	Red line
at 65 mph = 55 kts = 102 km/h	— Yellow triangle
	(recommended minimum appr. speed)

**Position Errors**

The airspeed indicator must be connected to the following sources: Pitot head in the tail fin, static vents side of the fuselage between the two seats.

Using a calibrated ASI the position error is not greater than  $\pm 2 \text{ km/h}$  or 1 kt or 1.2 mph. A calibration curve is therefore not necessary.

**II. 5 Flight envelope.**

The sailplane design limit load factors are as follows:

At manoeuvring speed + 5.3 — 2.65

At  $V_{NE}$  + 4.0 — 1.5

(Brakes closed and calm air)

## II. 6 Weight limits

Maximum permitted weight without water ballast	650 kg (1435 lbs)
Including water ballast . . . . .	650 kg (1435 lbs)
Maximum permitted weight of non lifting parts .	470 kg (1036 lbs)

## II. 7 Centre of gravity position

The approved range of centre of gravity positions during flight is 260 mm (10.24 inches) to 460 mm (18.11 inches) behind the reference point, equivalent to 24.7% to 43.6% of the M.A.C. of the wing.

The reference point is the front edge of the wing at the wing root.

The approved centre of gravity range does not get exceeded by the payload distribution specified in the loading plan II. 8.

The exact position of the centre of gravity at flying weight can be calculated according to VI- 5.

## II. 8 Load scheme TWIN ASTIR

Minimum load in the front seat . . . . .	70 kg (154 lbs)
Maximum load in the front seat . . . . .	110 kg (242 lbs)
Maximum load in the back seat . . . . .	110 kg (242 lbs)
Maximum load in both seats . . . . .	220 kg (485 lbs)
Maximum load in the baggage compartment .	10 kg ( 22 lbs)

Ballast must be used on the front seat to compensate if the front seat load is lower than 70 kg (154 lbs).

The maximum flying weight of 650 kg (1435 lbs) must not be exceeded.

Waterballast may only be taken on until the maximum flying weight is reached.

Water ballast can not be used to compensate if the load in the front seat is too low.



## II. 9 Tow hooks

For Aerotow: Nose hook "E 75".

For Winch launch: Safety back release hook "G 73".

The E 75 and the G 73 Tost hooks are limited to 36 months after installation or 2000 launches which ever occurs first, at which time they are to be recertified by the manufacturer.

## II. 10 Weak link strength recommended

Winch launch and aerotow *max 845 kg* *1857 lbs*  
 (ie. Tost weak link colour code black-red) *600 ± 30 kg* *1323 ± 66 lbs*  
*TM 315-19*

## II. 11 Tire Pressure

Tire size 5.50-5 . . . . . 2,5-2.8 atm. 35,6-39,8 PSI

## II. 12 Crosswinds

The maximum crosswind component approved for take off and landing, is 20 km/h (11 kts, 12 mph).

## II. 13 Required placards front and rear cockpit

<b>Maximum flying weight</b>				
Without Waterballast		650 kp	1435 lbs	
With Waterballast		650 kp	1435 lbs	
<b>Airspeed limits</b>				
		km/hr	knots	mph
Never exceed	$V_{NE}$	250	135	155
In Rough Air	$V_B$	170	92	105
On Airtow	$V_T$	170	92	105
On Winch or Auto Launch	$V_W$	120	64	74
Airbrakes Open	$V_{DF}$	250	135	155
Manoeuvring	$V_A$	170	92	105

<b>Payload (Pilot and Parachute)</b>		
Minimum in Front cockpit for all flight	70 kg	154 lb
Less must be compensated with ballast secured in the seat		
Maximum load front	110 kg	242 lb
Maximum load back	110 kg	242 lb

<b>Simple aerobatics air speeds</b>			
Recommended entry speed	km/hr	knots	mph
Loop	180	97	111
Stall turn	180	97	111
Spin	80	43	50
Chandelle	170	92	105
aerobatics with waterballast is not allowed			

**Required placards****Check before launch**

- Full and free movement of controls?
- Parachute secured?
- Straps tight and locked?
- Pedals adjusted and locked?
- Brakes closed and locked?
- Trim correctly adjusted?
- Altimeter adjusted?
- Canopy locked?
- Cable on correct hook?
- Beware: – Crosswind! – Cable break!

Front Cockpit

**Canopy Jettison and Emergency Exit**

- Pull red handles on right and left of canopy fully back together
- Push canopy up and away with the left hand
- Release safety harness
- Stand up and get out over left or right side depending on the altitude
- When using a manual parachute grip release and pull firmly to full extent after 1–3 seconds

By canopy release front and back

**Tire Pressure**  
**39,8 PSI 2,8 atm**

**Maximum weak  
link strength**  
**1323 lbs 600 kg**


Left undercarriage door.

**Baggage maximum**


**22 lbs 10 kg**

Baggage compartment


II. 14 Symbols

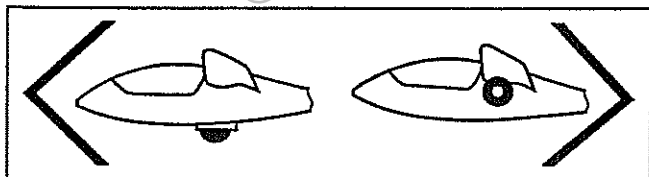


**Undercarriage retract**

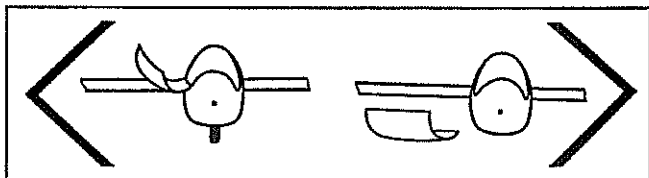


**Canopy open  
Canopy jettison**

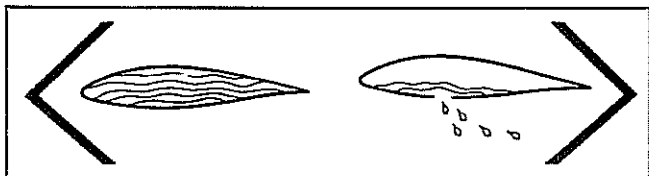

**Waterballast jettison**

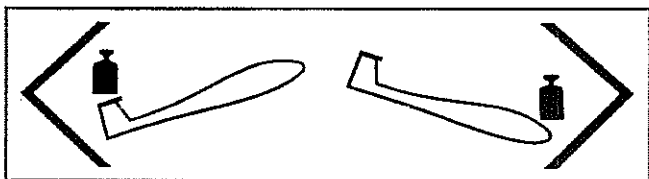

**Trim**


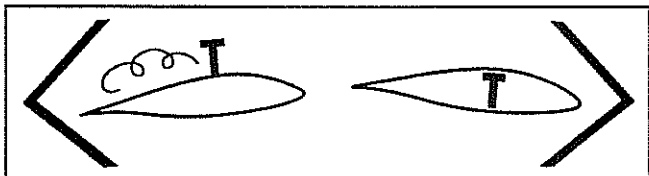


**Airbrakes**



**Wheelbrake**



**Symbols****Cable release****Air-vent**

Top left of front  
instrument panel

**Pedal adjustment**

Top right of front  
instrument panel

**Total energy  
compensation tube**

### III. Emergency procedures

#### III. 1 Exit from a spin

Exit from a spin can be accomplished by

- Full opposite Rudder
- Neutralise Stick
- Ailerons should be central
- When rotation stops centralise rudder and pull out gently.

#### III. 2 Emergency canopy jettisoning and exit.

The spacious cockpit allows unhindered exit in an emergency. It is advisable to keep to the following order:

- a) Pull red handles on left and right back together and push canopy upwards and away with the left hand.
- b) unlock safety belts
- c) Stand up and get out over left or right side depending on the attitude.
- d) When using a manual parachute grip release handle and pull firmly to full extent after 1 – 3 seconds.

#### III. 3 Landing with retracted undercarriage

It is possible on hard and soft ground without risk of overturning. Approach as normal and touch down on two points.

#### III. 4 Others

##### Flying in rain

Wet or lightly iced wings have little noticeable effect on flying. Thick ice deposits on the wing increase the stalling speed by about 10 km/h = 6 kts.

##### Stall

Stall out of straight flight or a turn: Neutralise stick and opposite rudder to any turn.

##### Ground Loops

The glider has no tendency to ground loop whilst taking off. However if a wing touches or the direction changes by more than 15 degrees during a take off release immediately.

### III. 5 Instruments specifications

#### Basic equipment: Airspeed

The installation error of an airspeed indicator is not greater than 2 km/h or 1 kt. or 1,2 mph using the pitot tube in the tail fin and the static vents side of the cockpit.

The original certification was carried out using a Winter 6FMS4-2 and a PZL PR 400 S Airspeed indicator.

A similar FAA approved airspeed indicator to meet TSO C 2 reading to 300 km/h (162 kts, 187 mph) may be used.

#### Altimeter


The original certification was carried out using a Winter 4FGH 10 and a PZL 12 S Altimeter.

A similar FAA approved altimeter to meet TSO C 10 with a range to 35.000 feet may be used.

#### IV. Normal operation

#### VI. 1 Cockpit and controls

##### Front Seat.

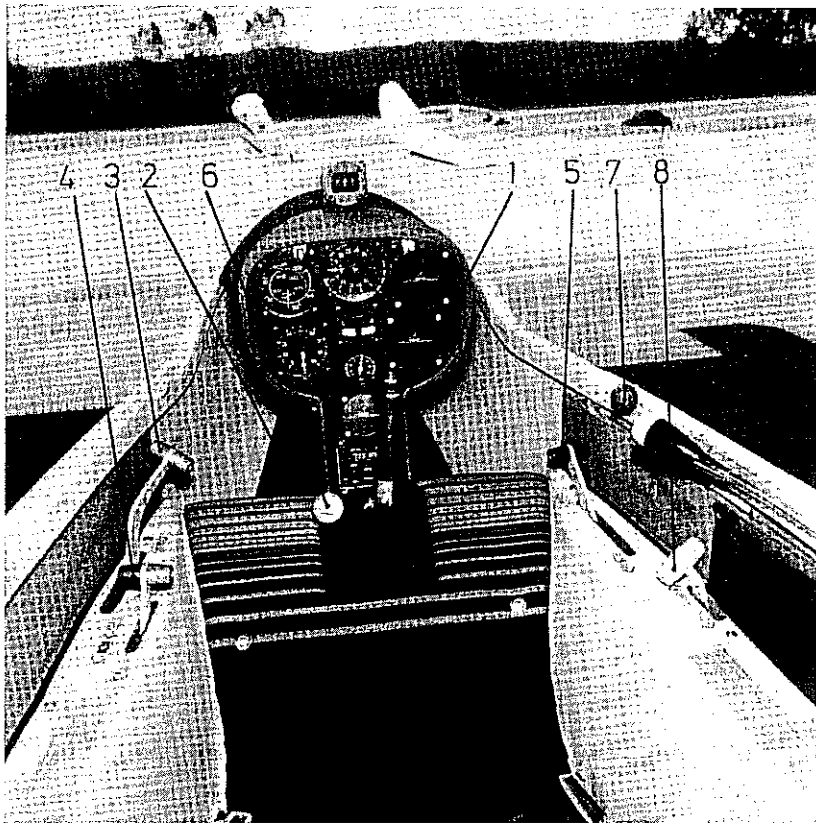

- |   |                               |   |                        |
|---|-------------------------------|---|------------------------|
| 1 | Stick                         | 5 | Undercarriage lever    |
| 2 | Rudder pedals                 | 6 | Release knob           |
| 3 | Airbrake lever and wheelbrake | 7 | Canopy jettison        |
| 4 | Trim lever                    | 8 | Water ballast jettison |

Ventilator top of instrument panel left side.

Rudder pedal adjustment top of instrument panel right side.

#### IV. 1 Cockpit and controls

Back seat.




- |                                 |                       |
|---------------------------------|-----------------------|
| 1 Stick                         | 4 Trim lever          |
| 2 Rudder pedals                 | 5 Undercarriage lever |
| 3 Airbrake lever and wheelbrake | 6 Release knob        |
|                                 | 7 Canopy jettison     |

#### IV. 2 Daily preflight inspection

1.
  - a) Open canopy.
  - b) Check the 4 wing fastenings inside the fuselage if locked.
  - c) Visually check all controls inside the cockpit.
  - d) Check for foreign bodies.
  - e) Test controls for full and free movement.
  - f) Check tire pressure 2.5 – 2.8 atm. = 35.6 — 39.8 PSI
  - g) Check condition of both hooks.
  - h) Check functioning of releases and wheelbrake.
2.
  - a) Check top and bottom of wing for damage.
  - b) Check ailerons for condition, freedom of movement and play.
  - c) Check airbrakes for condition, locking and fit.
3. Check fuselage for damage especially on the underside.
4. Check tail unit for correct assembly and that safety lock is in position.
5. Check condition of the tailskid.
6. Check the pitot tube, total energy venturi and static vents are clean.
7. Repeat step 2 for right wing.
8. Check static vents.

After heavy landings or excessive flight loads the entire glider should be checked. The wings and tailplane should be removed for these checks and if any damage is found an inspector should be consulted. The plane should not be flown before any damage is repaired.

**Preflight Inspection Checkpoints**  
compare IV. - 2

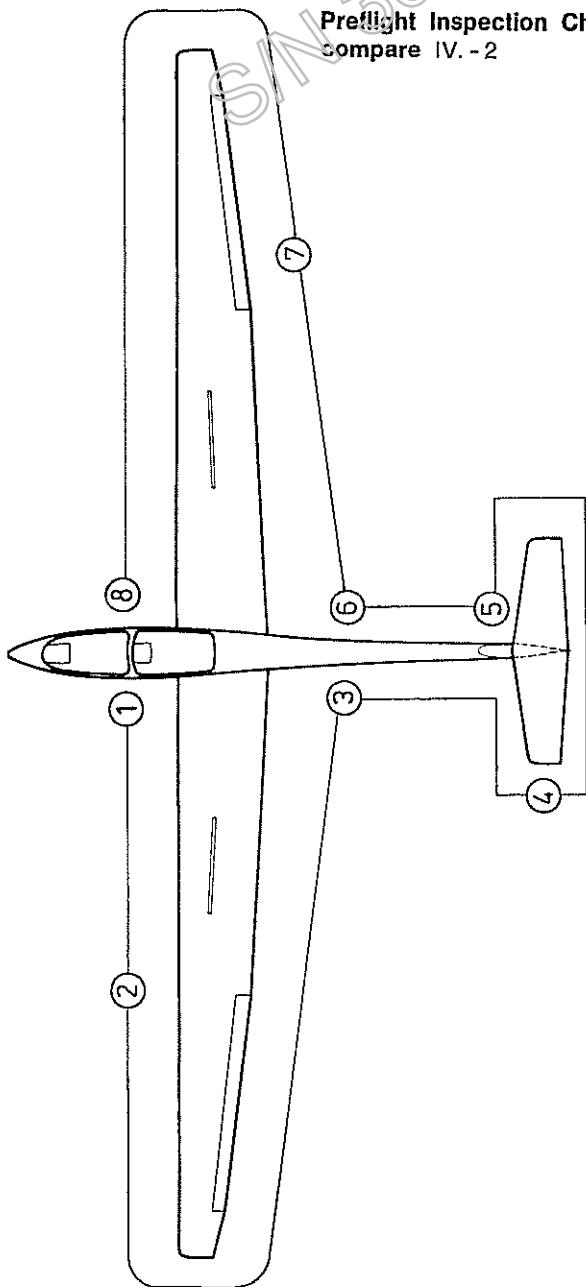

#### IV. 3 Control checks before take off

1. Check all the controls for full and free movement.
2. Check undercarriage lever is fully forward and locked down.
3. Check that the ballast limitations are being adhered to.
4. Check safety straps and parachute are firmly fastened.
5. Check altimeter is adjusted to zero or airfield height.
6. Check that transmitter is switched on and set to airfield frequency.
7. Check trim is neutral.
8. Check canopy is closed and locked.
9. Check airbrakes are closed and locked.

#### IV. 4 Take off

##### Winch launch

Trim lever should be in central position.

Maximum winch launch speed is 120 km/h (65 kts, 74 mph).

The glider has a release hook in front of the wheel.

Winch launches cause no difficulties at all allowed centre of gravity positions and wing loadings.

The plane has no tendency to balloon up or to swing on the ground.

One should push forward slightly on the stick below about 100 metres (330 ft.) in the case of fast launches from a powerful winch. When the cable slackens pull the release firmly to its limit.

The undercarriage should not be retracted during a winch launch.

##### Aerotow

Trim lever should be in central position.

Maximum aerotow speed is 170 km/h (92 kts, 105 mph).

Aerotow should preferably use the nose hook.

The recommended length of tow rope is 40 — 60 m (120 — 200 ft.).

The glider can be controlled with coordinated rudder and aileron using full movements if required.

There is no tendency to swing in a strong crosswind.

The glider can be lifted off at about 70 km/h (38 kts, 44 mph).

The glider lifts off without assistance at a speed of about 80 km/h (43 kts, 50 mph) if the stick is kept in the neutral position.

The undercarriage can be retracted during aerotow at a reasonable height.

The yellow release handle is mounted on the instrument panel and must be pulled to its limit when releasing.



#### IV. 5 Free flight

It is possible to fly the glider over the entire speed range in all attitudes.

Full control movements are only allowed up to the manoeuvring speed 170 km/h (92 kts, 105 mph). At higher speeds the controls should be used with the appropriate care.

#### IV. 6 Slow flying and stalling

The glider gives clear warning when about to stall by a distinct shaking of the elevator.

The stalling speed depends on the wing loading and the condition of the plane. The following are guidelines:

##### Single seater

Weight	Without Airbrakes	With Airbrakes
470 kg = 1034 lbs	66 km/h (36 kts, 41 mph)	75 km/h (40,5 kts, 47 mph)

##### Double seater

Weight	Without Airbrakes	With Airbrakes
650 kg = 1430 lbs	80 km/h (43 kts, 50 mph)	90 km/h (49 kts, 46 mph)

If the stick is pulled back further the glider goes into a controllable high rate of sink, during which rudder and aileron turns can be flown at up to 15 degrees of bank. When the stick is released the glider returns to a normal flying attitude immediately.

After the stick is pulled back quickly the glider pitches nose down and the bank can still be controlled with aileron.

#### IV. 7 High speed flight

There is no tendency for flutter to develop within the permitted speed range. Above 170 km/h (92 kts, 105 mph) control movements should be restricted to 1/3 of full range. The airbrakes limit the speed to under VNE in a 45° dive even at maximum flying weight.

#### IV. 8 Cloud flying

The minimum instrumentation required for flying in cloud is:

Air speed indicator	Variometer	Turn and Slip
Altimeter	Compass	

Experience to date shows that the ASI does not get affected by icing.

If the manouvering speed is exceeded unintentionally, pull out the airbrakes to avoid overstressing.

In emergency open brakes and leave cloud at about 170 km/h (92 kts, 105 mph).

#### IV. 9 Simple Aerobatics

The glider is licenced for the following aerobatics (no waterballast):

##### 1. Loop

Entry speed *	180 km/h (97 kts, 111 mph)
Maximum g	ca. 3 g
exit speed	ca. 180 km/h (97 kts, 111 mph)

##### 2. Stall turn

Entry speed *	180 km/h (97 kts, 111 mph)
---------------	----------------------------

At 140 km/h (76 kts, 87 mph) slowly apply rudder.  
Shortly before the top apply opposite aileron.

Note: The stall turn is difficult to carry out because of the high moment of inertia. If a tailslide is accidentally initiated during the climb lock all controls in the centre position.

##### 3. Spin (possible in aft c.G. positions only)

Preparation. Decrease speed slowly to 80 km/h (43 kts, 50 mph) pull stick back and give full rudder. Glider spins slowly. Rotation rate is one turn every 3 seconds with a height loss of about 100 m (300 ft.) per turn.

Exit Rudder fully opposite against direction of turn, neutralise stick then pull out slowly after rotation has stopped.

#### 4. Chandelle

Entry speed \* 170 km/h (92 kts, 105 mph)

Pull up to fly 90° turn. During turn decrease speed and exit from turn with rudder and aileron. Chandelle should be completed heading in opposite direction.

\* NB: For towseater configuration increase entry speed by 20 km/h (12 mph, 11 kts).

### IV. 10 Approach and landing

Normal flying practice is to approach at 100 km/h = 54 kts. The airbrakes are sufficiently powerful for steep approaches. The use of brakes causes the glider to be slightly nose heavy, so that the glider holds the required speed by itself.

Avoid changing the airbrake setting during the roundout to avoid heavy landing.

### IV. 11 Flight with waterballast

The water tanks are in the front of the wings and can hold about 50 l (11 gal.) per wing. The tanks are filled through the openings on the top of the wings. The cap can be removed with a pin. There is no noticeable water movement when the tanks are partially filled because of baffles installed within the tanks. There must always be equal amounts of water in each tank to avoid affecting the stability in roll.

The white lever on the right hand side of the cockpit should be pulled back to empty the tanks. The outlet is underneath the fuselage behind the wheel. It takes about 4 minutes to empty the tanks. It is strongly recommended that the tanks are emptied before landing out of field.

## V. Rigging and derigging

### V. 1 Rigging

The fuselage must be held firmly in a horizontal position when rigging. It is recommended to use a fuselage stand or the trailer fittings are used.

The glider can be rigged by 4 people.

#### 1. Wings

Unlock the 4 main wing fittings in the fuselage. Unlock the air-brakes on the wings. Guide the right wing into the fuselage. The safety catches on the fuselage fittings should now be released, and on gently moving the wing to and fro will be heard to snap into place. Next guide the left wing into the fuselage. Move the wing tips up or down so that the pin on the end of the spar stub is lined up with the appropriate hole in the opposite wing root and slide into place. Next release the safety catches on the left hand fuselage fittings and by gently moving the wing to and fro they too can be made to snap into place.

#### Original wing-fuselage connection:



To secure the wing fittings the safety catches (1) have to be turned so that the pins (2) are pressed to the angled slots.

Moving the wing tip strongly to and fro enables the safety catches to be sufficiently turned (4). They should be hand tight and should not reach the end of the angled slot.

#### Wing-fuselage connection according to SB 315-58:

To secure the wing-fuselage connection in the closes position, the knurled nut (1) must be turned into the threaded socket (2) so that the socket is drawn against the red rings which are held by the guide pins (3).

By means of moving the wing tips for and aft, the knurled nut can be secured tight (4) while securing the guide pins however, must not strike against the end of the milled selector of the shaft guide.

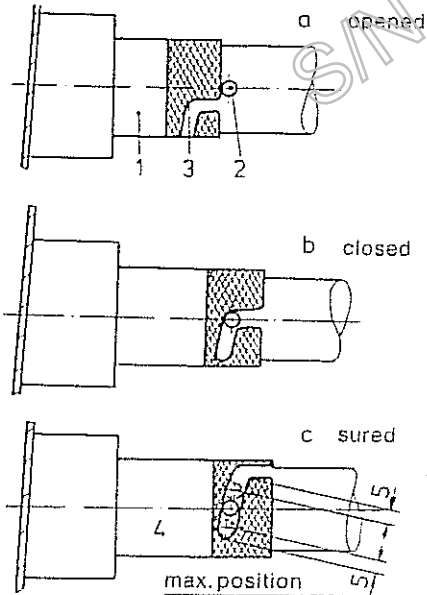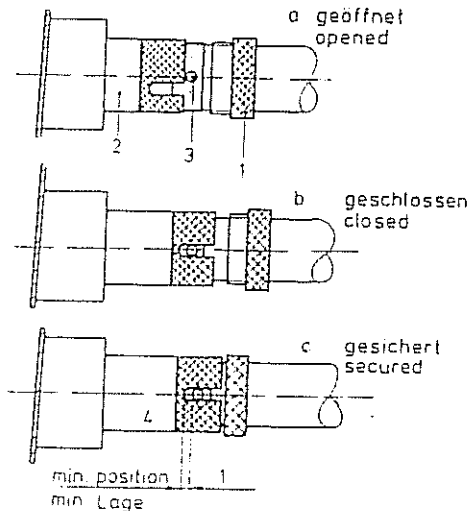Original wing-fuselage connection:Wing-fuselage connection accordingto SB 315-58:

Check: The red rings at the fuselage connection rods must be covered by the threaded sockets, the socket (or the knurled nut acc. to SB 315-58) must be tightened hand tight.

In the closed, but not secured position (b), the wing bolt cannot be removed from the locking.

## 2. The aileron and brake connections lie behind the spar.

The short connecting rods in the fuselage are fitted with quick lock fasteners which must be coupled onto the balls on the linkages that move inside the wings.

After rigging the connections should be examined to check that the sprung catches are properly inserted so that they project some mm out of the locks.

Also after coupling the quick-lock fasteners, check that the ball can not be extracted by twisting the lock back and forth. Do this gently with not more than 10 lbs pull. Check all the control connecting rods and locks in a methodical order.

### 3. Tailplane

Before assembly is commenced the front cover must be opened and the rotating wing bolt pulled out to the limit. The tailplane can be positioned by standing behind the rudder. The tailplane can be rested on top of the fin with the elevator angled upwards so that the snap lock fastener on the elevator push rod can be attached to the ball on the elevator horn. The front of the tailplane can then be lowered and pushed back onto the three pins. It is then necessary to tighten the wing bolt clockwise to secure the tailplane. The assembly is complete when the wing bolt is sufficiently tight that there is no play in any direction. The cover provides a safety measure as it can only be attached with the wing bolt horizontal. If necessary the wing bolt has to be turned a 1/4 turn to suit. Derigging is carried out in the opposite order and the wing bolt is turned anticlockwise and pulled fully out.

#### Checks to be made after assembly

1. Check that the 4 main wing fittings are locked.
2. Check that aileron and brake quick-actions locks are properly located on the knobs.
3. Ensure that the tow hook is functioning correctly.
4. Test the operation of the wheelbrake and the pressure of the air in the tire.
5. Check that the tailplane is securely seated and that the elevator push-rod is connected.
6. Rudder movement.

#### Derigging

Derigging is carried out in the opposite order and in this case it does not matter which wing is removed first. Excessive fore and aft rocking of the wing tips should be avoided.

#### V. 2 Storage

When the glider is stored the canopy should be locked. To tie down the wing, a rope can be pulled through the wing tip skids.

For ground handling the rotating tail wheel should be used.

### V. 3 Transport

We recommend the use of a closed trailer for transporting the glider. The parts must be carefully supported and secured so they cannot slide.

#### 1. Fuselage

A fuselage trolley moulded to the shape of the fuselage and positioned in front of the main wheel. The minimum length of the trolley should be 400 mm and it can be attached to the wing fittings if required. The tail skid should be secured so that it cannot slide sideways.

#### 2. Wings

The minimum length for the spar support should be 200 mm and should start at the face of the root rib. The mounting must be padded well with foam rubber or felt.

The mounting under the aileron inboard end should be a shaped mounting block with a minimum length of 300 mm and height of 400 mm. The mounting must be padded with felt.

#### 3. Tailplane

Either horizontal on padded supports with the upper surface downwards and secured with straps or vertical supported on the leading edge in shaped mounting blocks.

Profile drawings are available for the manufacture of fuselage, wing and tailplane fittings.

### V. 4 Maintenance of the glider

The entire surface of the glider is coated with weather resistant white polyester gelcoat.

The greatest care should be taken in maintaining the fibre glass surface of the glider. Luke warm water should be used to wash off dust, grease, dead flies and other dirty marks. More resistant dirt should be removed by using a mild cleaning agent. Only special silicon-free preparations should be used in maintaining the painted surfaces. (1 Z-Spezialreiniger – D 2, Fa. W. Sauer and Co., 5066 Bensberg or Reinigungspolish Fa. Lesonal).

Although very resistant the glider should be protected as much as possible against rain and dampness. Water that has seeped in should be dealt with by storing the glider in a dry place, frequently turning over the dismantled parts.

The most effective way to clean the canopy is to use a special perspex cleaner but if necessary luke warm water can be used. A soft, clean cloth or chamois-leather should be employed to wipe the canopy down. Never rub perspex with anything dry.

The Safety harness should be regularly checked for damage and general wear. The metal parts of the harness should be frequently checked for corrosion.

Because of its position, the winch launch hook is susceptible to getting very grimy and muddy. It must therefore be frequently inspected for damage, cleaned and greased. When the seat-well is removed the hook can easily be taken out. Remove the connecting wire from the lever and take out the retaining screws. For reconditioning, the tow hook should be sent with the record card to the tow hook manufacturer, Tost. For further details the manufacturers manuals should be consulted.

The cables and pulley for the nose and belly hooks should be checked for wear during the yearly inspection. The main wheel tire pressure should be kept at 2.5 to 2.8 atmospheres (36-40 psi).

The wheelbrake is of a drum type (for S/N's 3000-3139 optional as a hydraulic disc brake).

Drum brake: The bowden cable can be adjusted. The adjustment is carried out by moving the Bowden cable at the drum end.

Disc brake: The main brake cylinder and the brake fluid reservoir are located under the rear seat. Use only brake fluid according to specification DOT3/ DOT4. During removing the main wheel for cleaning, greasing or changing the tire the Bowden cable must be disconnected from the brake lever (drum brake) or the brake cylinder must be removed (disc brake). Do not open the brake fluid hose.

Screw the M6 threaded special tool onto one side of the axle and take out the screws and the spindle. Remove the screws that hold the brake-lever in place. Take the wheel out by pulling it downwards. Clean all the parts and before re-assembly smear all of them with grease.


Before assembling the glider the pins and sockets at the joints between wings and fuselage, and tailplane and fuselage, should be cleaned and greased.



VI. Appendices

VI. 1 Flight Performance

Flying weight	470 (1036)	560 (1234)	650 (1435)	kg (lbs)
Wing loading	26.4 (5.4)	31.5 (6.5)	36.5 (7.5)	kg/m <sup>2</sup> (lbs/ft. <sup>2</sup> )
Best glide Angle	37.0	37.5	38.0	
at a speed of	95 (51)	105 (57)	110 (60)	km/hr (kts)
Minimum sink	0.62 (2.03)	0.68 (2.23)	0.73 (2.3)	m/sec (ft./sec)
at a speed of	75 (40)	80 (43)	90 (49)	km/hr (kts)

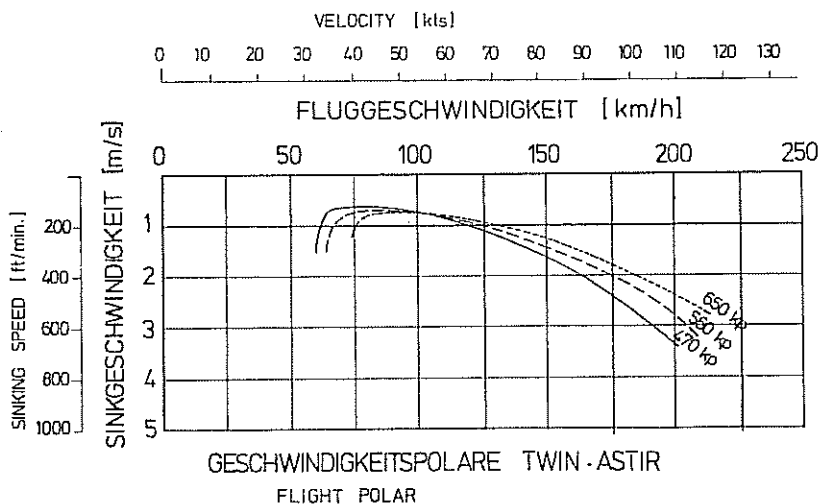

## VI. 2 Service and Maintenance instructions

### Regular service.

The following schedule of service should be carried out every 100 hours or at the annual inspection, which occurs first.

1. The entire glider should be checked for cracks, holes and bumps.
2. All fittings should be inspected for satisfactory condition (play, scores and corrosion).
3. All metal parts should be examined for corrosion, cracks, deformation and if necessary reconditioned and freshly protected.
4. Check that there is no play in the wing and tailplane to fuselage fittings.
5. The control linkages (Bearings, stops, fittings, hinges and control cables) should be inspected and replaced if there is evidence of bending or corrosion.
6. The controls including the brakes should be submitted to a functional test and the control deflections checked.
7. If the controls do not move free throughout their range, search for the cause and correct.
8. The undercarriage should be inspected and the wheel and brake checked to be in good condition.
9. The tow hooks should be treated in accordance with their appropriate maintenance manual.
10. Check the pitot for the ASI is clear and that the tubing to all instruments is in good condition and free of leaks or kinks.
11. The condition and calibration of all instruments should be checked and any other equipment inspected.
12. Equipment and Instruments should be checked against the equipment list.
13. Check markings and placards.
14. After repair or change of equipment, the weight table should be updated with the new empty weight and Center of Gravity by weighing or calculation.

After extended storage check accordingly to regular service pos. 1 to 11 and inspect for evidence of rodents and birdness.

### **VI. 3 Reference to Repairs**

The attached repair instructions give information for the execution of minor repairs.

Major repairs, in accordance with the glider information sheet are only permitted to be carried out by an authorised aircraft works. Grob will name a company with the appropriate qualifications in any individual case.

### **VI. 4 Installation, maintenance and examination of the release hooks**


One is bound by the Maintenance Manuals for the nose hooks 'E 72' and 'E 75' published in May 1975 and the Maintenance Manual for the belly hooks 'Europa G 72' and 'Europa G 73' published in May 1975.

### **VI. 5 Determination of the Center of Gravity**

The determination of the center of gravity is made with the undercarriage lowered and the glider supported on two scales at heights such that an incidence board of 600 : 24 angle is set horizontal on the back of the fuselage.

The reference plane lies at the front of the wing at the root. The distances a and b are measured with the help of a plumb line. The empty weight is the sum of the two weights  $G_1$  and  $G_2$ .

Procedure for determining C. of G. empty

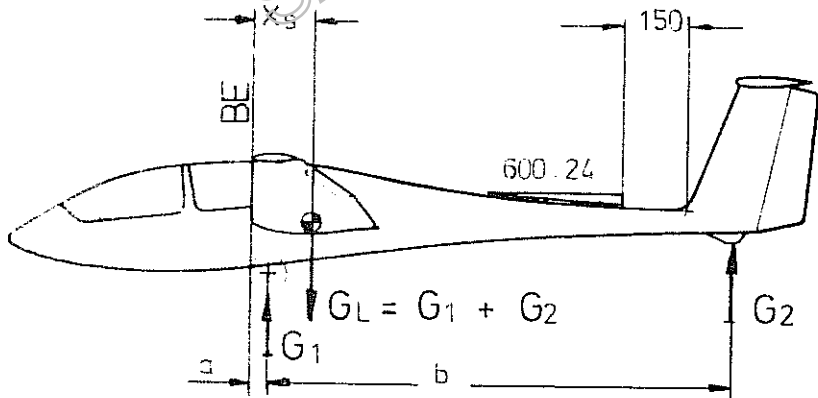

Datum Line Front edge of the wing at the root

Level Means With a 600:24 Incidence Board set up horizontal on the top of the rear fuselage.

Weight on main-wheel	$G_1 =$	kg / lbs
Weight on tail-skid	$G_2 =$	kg / lbs
Empty Weight $G_L = G_1 + G_2 =$		kg / lbs
Distance to main-wheel	$a =$	mm / inches
Distance to tail-skid	$b =$	mm / inches

Empty Weight C. of G.

$$x = \frac{G_2 \times b}{G_L} + a = \text{mm/inches behind Datum Line}$$

The measurements to determine the empty weight, the empty weight C. of G. and the loading limitations must always be taken with the gutter empty of waterballast.

Conversion	from	to	multiply with
	kg	lbs	2,2
	mm	inches	0,0394

If the limits of the empty weight C. of G. positions and the loading limitations chart are adhered to the C. of G. of the loaded glider will be within the permitted range.

Empty Weight		Range of C. of G. behind Datum			
kg	lbs	Forward		Aft	
		mm	inches	mm	inches
390	860	725	28.54	747	29.41
395	871	719	28.31	744	29.29
400	882	713	28.07	740	29.13
405	893	708	27.87	737	29.02
410	904	702	27.64	733	28.86
415	915	697	27.44	730	28.74
420	926	692	27.24	727	28.62
425	937	687	27.05	724	28.50
430	948	682	26.85	720	28.35

It should be noted that to make use of the maximum load the maximum admissible load for non-lifting parts must not be exceeded.

The weight of the non-lifting parts is the sum of the fuselage, tailplane and maximum load in the fuselage and must not exceed 470 kgs (1036 lbs) or the maximum load permitted in the fuselage must be correspondingly decreased.

The Centre of Gravity should be recalculated after repair, repainting, the installation of additional equipment or when a period of 4 years has elapsed after the last weighing.

The empty weight, empty weight C. of G. position and maximum load, should be recorded after each weighing on page 9 of the Flight Handbook.



GROB FLUGZEUGBAU  
8939 Mattsies  
Flugplatz Mindelheim-Mattsies  
Telefon 0 82 68 / 4 11

# Maintenance Handbook

This handbook must be carried on board at all times.

It refers to the TWIN ASTIR Sailplane.

Registration:

Factory Serial Number:

Owner:

---

---

---



German edition of operating instructions are approved under § 12/2.  
of LuftGerPO.

Published May 1978

Approval of translation has been done by best knowledge and judgement — In any case the  
original text in German language is authoritative.

Index	page
Updates	2
I. Technical Data	3
II. Description of components	5
II. 1 Control Linkages	5
II. 2 Installation of Radio	11
II. 3 Installation of Oxygen	11
II. 4 Pressure tubing and connections to the instruments	12
III. Rigging Data and specifications	13
IV. Determination of the center of gravity	14
V. Weight and Moments of Inertia of the control surfaces	16
VI. Checks	17
VII. Regular Service	18
VIII. Lubrication	19
IX. Labels and Markings	20
X. General care	22
XI. Inspection procedure for increase of service time	23

Updates:

Rev.No.	Page	Reference	Date	Signature	LBA - approval
1	19a	TRAINER undercarriage	01.10.78		
2	2, 19	Maintenance of Hotellier-quick-connectors	04.05.81		
3	1, 2, 23	Inspection procedure for increase of service time	30.09.81		
4	2, 16, 22, 23	Extension of service life	11.10.91		
5	2, 21	Envelope limitations ASB315-64	30.06.2003		
6	2, 21	MSB 315-64/3 Revised Limits of Operation	14.09.2004		2. OKT. 2004 



**I. Technical Data**

**Wings**

Profile Eppler		E 603	
Span	b	= 17,5 m	57.4 ft.
Area	F	= 17,8 m <sup>2</sup>	191.6 sq. ft.
Aspect Ratio		17,1	

**Ailerons**

Span	b <sub>QR</sub>	= 3,1 m	10.17 ft.
Chord inner	ti	= 0,208 m	.68 ft.
outer	ta	= 0,165 m	.54 ft.
Area	F <sub>QR</sub>	= 1,16 m <sup>2</sup>	12.486 sq. ft.
% of Wing area		6,45 %	

**Fuselage**

Length	l	= 8,12 m	26.6 ft.
Width of cockpit	b	= 0,736 m	29 inches
Height of cockpit	h	= 1,06 m	41.7 inches
Height of tailplane	h	= 1,68 m	5.51 ft.
Surface area ca.	F	= 13,3 m <sup>2</sup>	143.16 sq. ft.

**Fin**

Height	h	= 1,4 m	4.59 ft.
Area	F	= 1,34 m <sup>2</sup>	14.42 sq. ft.
Aspect Ratio		1,46	1.46
Chord bottom	tu	= 1,2 m	3.94 ft.
top	to	= 0,8 m	2.62 ft.

**Rudder**

% of Fin		37,5 %	
Area	F	= 0,525 m <sup>2</sup>	5.65 sq. ft.

**Tailplane**

Span	b	=	3,3 m	10.8 ft.
Area	F	=	2,112 m <sup>2</sup>	22.7 sq. ft.
Aspect Ratio			5,16	5.16
Chord Inner	ti	=	0,815 m	2.67 ft.
Outer	ta	=	0,465 m	1.53

**Elevator**

Area	F	=	0,576 m <sup>2</sup>	6.20 sq. ft.
% of Tailplane			27,3 %	

**Airbrakes (Grob System)**

Area (Each)	F <sub>BK</sub>	=	0,504 m <sup>2</sup>	5.425 sq. ft.
Span	b	=	1,4 m	4.59 ft.
Height	h	=	0,17 m	6,7 inches

**Weights**

Empty weight	ca.	400 kg	882 lbs.
Load Maximum with Waterballast		250 kg	551 lbs.
1. Seat		110 kg	242 lbs.
2. Seat		110 kg	242 lbs.
Ballast	ca.	110 kg	220 lbs.
Load Minimum (1. Seat)		70 kg	154 lbs.
Maximum Flying Weight		650 kg	1430 lbs.
Load% of Flying Weight		37 %	
Wing Loading	26,9 – 36,5 kg/m <sup>2</sup>	5.51 – 7.48 lbs./sq. ft.	

Maximum weight of non-lifting parts                      470 kg    1036 lbs.

## II. Description of Components

### II. 1 Control Linkages

The control of the TWIN ASTIR is designed as a push-rod system. The stick, bellcranks and horns are made from Aluminium, the pushrods are made of steel tubing with welded connections.

#### Elevator

The control stick force is transferred from the control stick via the stick mounting frames to the elevator pushrod. The two control sticks are firmly connected. The rear control stick is detachable and held in place by a retaining nut. A single elevator pushrod leads from the rear stick to the elevator horn in the side fin. A connection rod with snap fastener drives the horn in the elevator. All the components in the fuselage may be dismantled. The elevator horn is laminated into the elevator. Stops for the elevator are situated on both stick mounting frames under the seats.

#### Aileron controls


The lateral control force is transferred from the control stick via a short connection rod to the aileron control bellcrank on the side of the fuselage. The aileron control bellcranks for both control sticks are rigidly connected by means of a pushrod. Pushrods lead from the rear crank via an intermediate crank at the wheel box to the lower connection to the linkage assembly in the bottom of the fuselage. The aileron control connection and the pushrods in the wing are driven via the inner drive shaft of the linkage assembly and the upper crank. The outboard aileron control differential lever in the wing drives the aileron directly via a short pushrod. All components of the aileron control system in the fuselage may be dismantled. The aileron control differential lever and the pushrod in the wing may only be dismantled through an opening made in the GFK skin. Stops for the aileron linkage are present on both control sticks.


### Rudder Linkages

Control cables lead from the front pedal mounting which can be adjusted in steps. The cables lie on the inside of the pedals and lead to the rear pedal controls. From there the main pushrod in the fuselage and the rudder are driven via the intermediate rudder pushrod and the rudder bellcrank at the wheel box. The whole of the rudder linkage system may be dismantled. The Stops for the rudder controls are located on the rear pedal support.

TWIN ASTIR

Seitensteuerung im Rumpf  
Rudder control in the fuselage

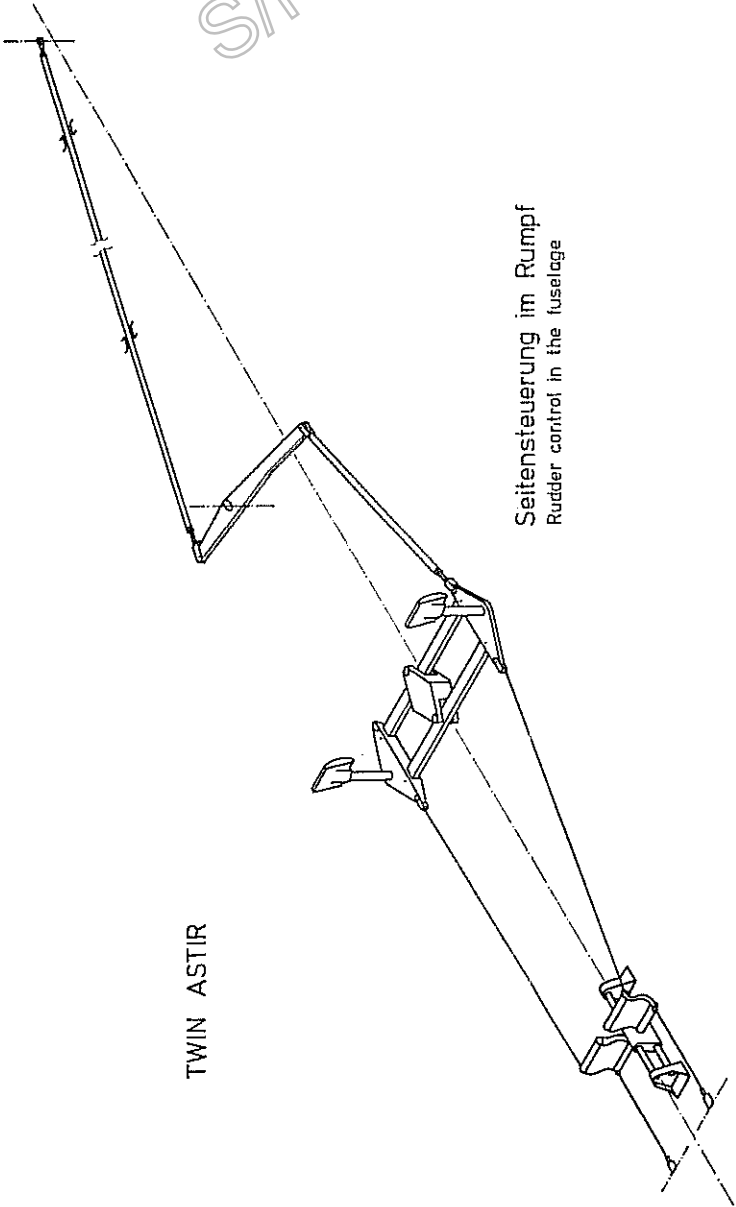

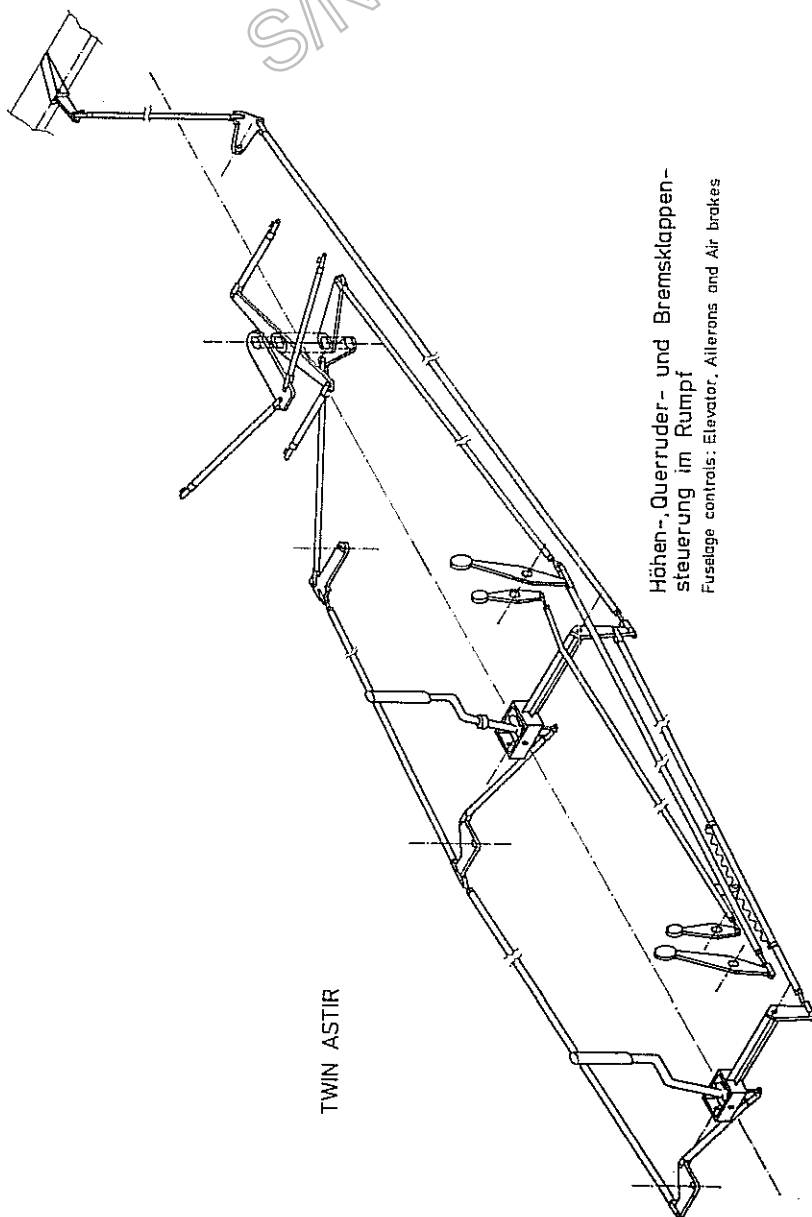


TWIN ASTIR

Höhen-, Querruder- und Bremsklappen-  
steuerung im Rumpf  
Fuselage controls: Elevator, Ailerons and Air brakes

S/N 3092

Copyright © 1988 by General Aviation Publications, Inc. All rights reserved. This publication is a technical manual and is not to be used for any other purpose. It is the property of General Aviation Publications, Inc. and is loaned to you. It is not to be distributed, copied, or otherwise used without the express written permission of General Aviation Publications, Inc. The information contained herein is for informational purposes only and is not intended to be used as a substitute for the manufacturer's instructions. The manufacturer's instructions should be consulted for complete and correct information. The information contained herein is for informational purposes only and is not intended to be used as a substitute for the manufacturer's instructions. The manufacturer's instructions should be consulted for complete and correct information.


S/N 3093

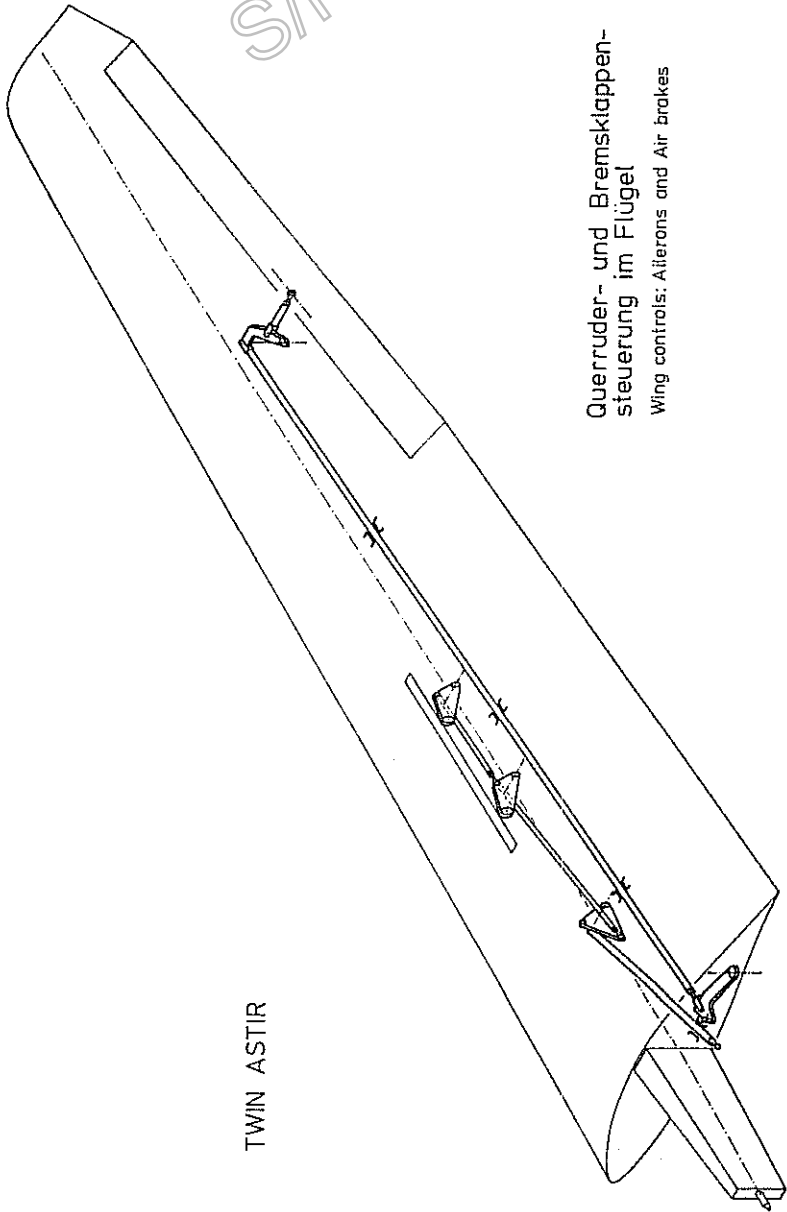

TWIN ASTIR

Querruder- und Bremsklappen-  
steuerung im Flügel

Wing controls: Ailerons and Air brakes

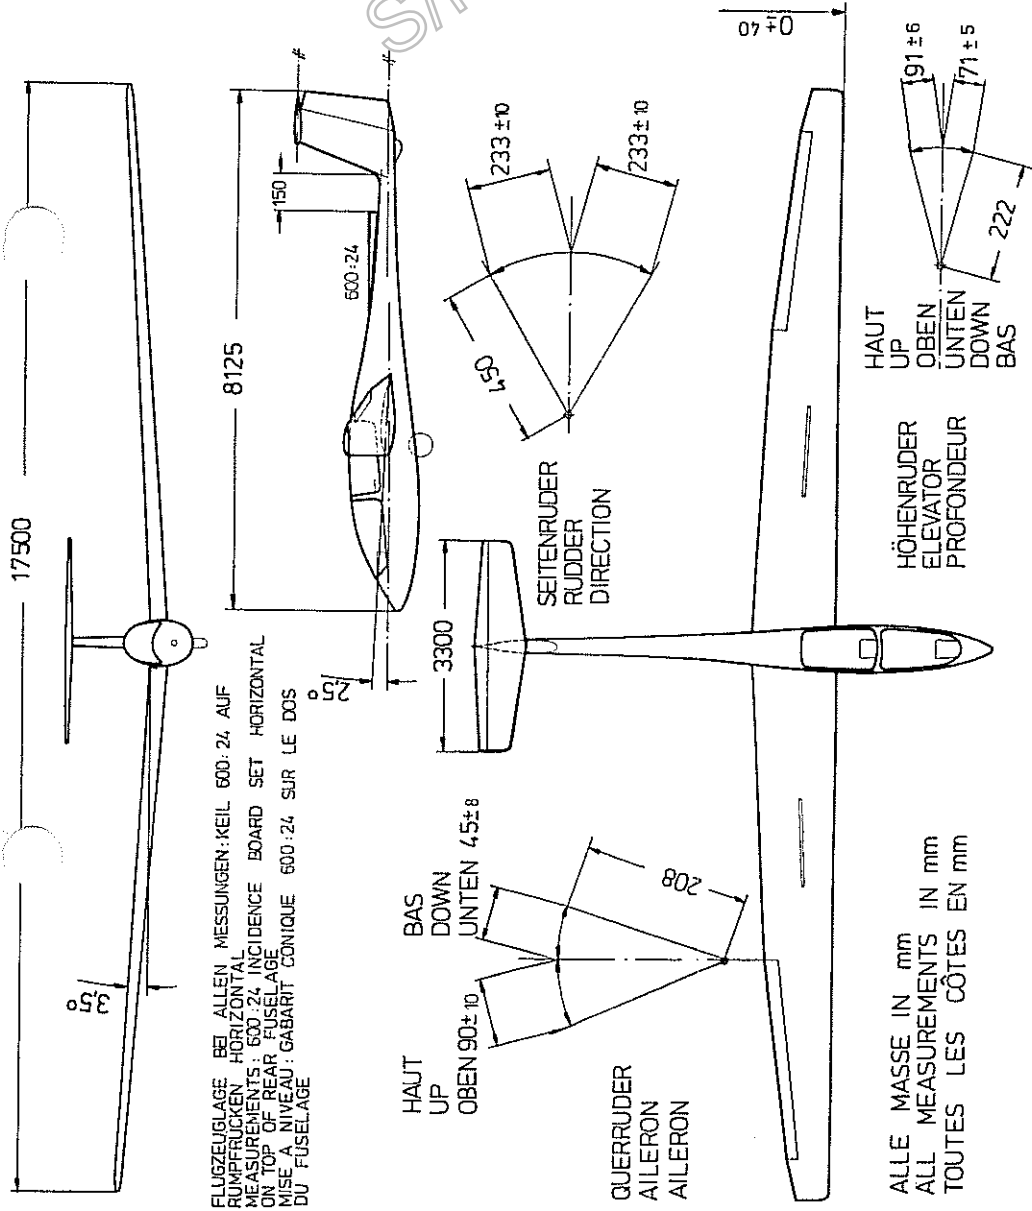




## II. 2 Installation of Radio

The front instrument panel may be obtained in three layouts and can accommodate a rectangular instrument (60 x 80 mm or 146 x 47 mm) as well as 80 mm diameter instruments. The internal loudspeaker should be mounted on the rear instrument panel. "Swan neck" microphone booms may be mounted to the pilots right on the canopy frame. The shelf under the rear control linkage complex is prepared for fixing a battery. Drawings for the installation of the radio unit can be obtained on request.

## II. 3 Installation of Oxygen

An Oxygen cylinder may be mounted behind the rear seat. Drawings for the installation of the Oxygen equipment can be obtained on request.

II. 4 Pressure tubing and connections to the instruments

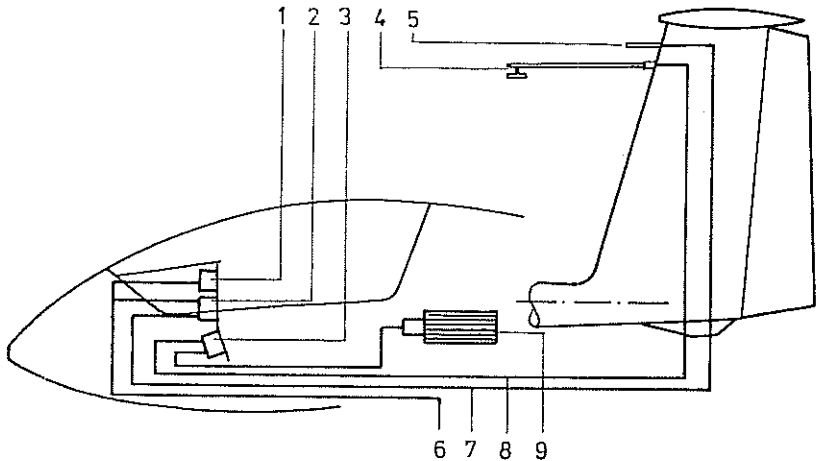


- 1 Höhenmesser (altimeter)
- 2 Fahrtmesser (air speed indicator)
- 3 Variometer (variometer)
- 4 Kompensationsdüse (total energy tube)
- 5 Staurohr (pitot tube)
- 6 Statischer Druck (static pressure) farblos (colourless)
- 7 Staudruck (pitot pressure) grün (green)
- 8 Düse (Totalenergy) rot (red)
- 9 Ausgleichsflasche (flask) blau (blue)

III. Rigging Data

Adjustment	Reference Line	Value	Tolerance
Wing — Incidence angle	Angle between the centre line of the wing and the longitudinal axis of the fuselage	2° 30'	± 15'
Wing — Sweep forward	Distance of line joining the wing tips from the reference line	0	± 40 mm (1.57 in)
Wing — Dihedral	Angle between the top surface of the wing and horizontal	3.5°	± 30'
Tailplane — Incidence angle	Angle between the chord of the tailplane and the longitudinal axis of the fuselage	0	± 15'
Reference line	Front of the wing at the root rib	QE 2980	(117.32 in.)
Control deflections	Upwards (right) Value	Downwards (left) Value	Measurement point from centre of rotation
Aileron Port	90 ± 10	45 ± 8	
Aileron Starboard	90 ± 10	45 ± 8	208 mm (8.19 in)
Elevator	91 ± 6	71 ± 5	222 mm (8.74 in)
Rudder	233 ± 10	233 ± 10	450 mm (17.72 in)
Release Hook	Backrelease load 0.5 to 1 kg	Maximum pull to release 7 kg	(1.1 to 2.2 lbs) (15.4 lbs)

airbrakes extend: outward end 170 ± 10 mm above wing surface.

V. Measurement of Center of Gravity position

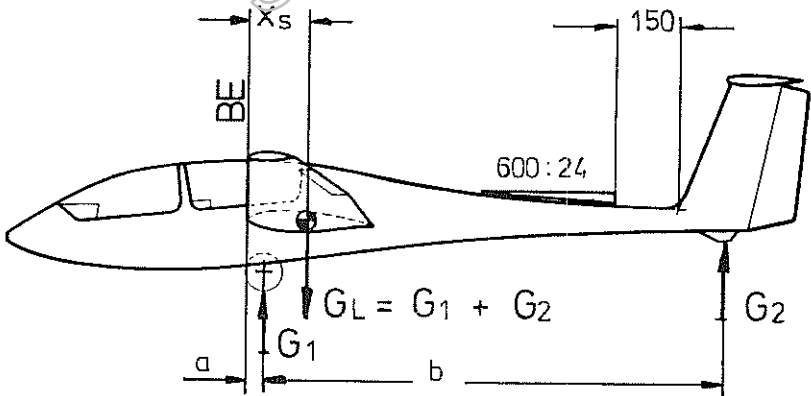

Datum Line: Front edge of the wing at the root

Level Means: With a 600:24 Incidence Board set up horizontal on the top of the rear fuselage.

Weight on main-wheel	$G_1 =$	kg/lbs
Weight on tail-skid	$G_2 =$	kg/lbs
Empty Weight	$G_L = G_1 + G_2 =$	kg/lbs
Distance to main-wheel	$a =$	mm/inches
Distance to tail-skid	$b =$	mm/inches

Empty weight C. of G.

$$X = \frac{G_2 \times b}{G_L} + a = \text{---} + = \text{mm/inches behind Datum Line}$$

The measurements to determine the empty weight, the empty weight C. of G., and the loading limitations should always be taken with the glider empty of waterballast.

<b>Conversion:</b>	from	to	multiply with
	kg	lbs	2,2
	mm	inches	0,0394

If the limits of the empty weight C. of G. positions and the loading limitations chart are adhered to the C. of G. of the loaded cylinder will be within permitted range.

Empty Weight		Range of C. of G. behind Datum			
		Forward		Aft	
kg	lbs	mm	inches	mm	inches
390	860	725	28.54	747	29.41
395	871	719	28.31	744	29.29
400	882	713	28.07	740	29.13
405	893	708	27.87	737	29.02
410	904	702	26.64	733	28.86
415	915	697	27.44	730	28.74
420	926	692	27.24	727	28.62
425	937	687	27.05	724	28.50
430	948	682	26.85	720	28.35

It should be noted that to make use of the maximum load the maximum admissible load for non-lifting parts must not be exceeded.

The weight of the non-lifting parts is the sum of the fuselage, tailplane and maximum load in the fuselage and must not exceed 470 kgs (1036 lbs) or the maximum load permitted in the fuselage must be correspondingly decreased.

The Center of Gravity should be rechecked after repair, repainting, the installation of additional equipment or when a period of 4 years has elapsed after the last weighing.

The empty weight, empty weight C. of G. position and maximum load, should be recorded after each weighing on page 9 of the Flight Handbook.


VI. Weights and moments of the control surfaces

Control Surface moments

The moments of the control surfaces must not exceed the following values:

Elevator	25.8 cm kg $\pm 12\%$	5.2 kg $\pm 12\%$
Rudder	24,9 cm kg $\pm 12\%$	6.5 kg $\pm 12\%$
Alleron	23.0 cm kg $\pm 12\%$	5.7 kg $\pm 12\%$

The moments must be measured with the control surfaces removed. To determine the moment  $M = P \cdot r$  the surface should be mounted at the hinge line with the minimum friction possible. The force  $P$  can be measured, for example, using a letter scale. If these values are exceeded the mass balance should be increased. Before carrying out repairs which for example involve charging the mass balance on a surface the manufacturer or his repair agent should be consulted.

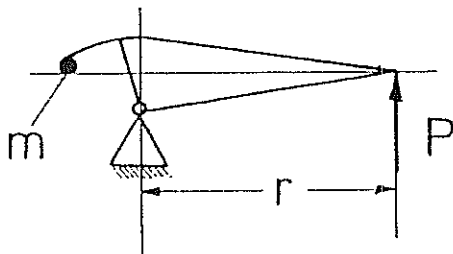

From Serialnumber 3073 the moments and weights of the control surfaces must not exceed the following values:

Elevator	25.8 cm kg $\pm 12\%$	5,2 kg $\pm 12\%$
Rudder	0-10 cm kg $\pm 12\%$	max. 8 kg $\pm 12\%$
Alleron	0-6 cm kg $\pm 12\%$	max. 8 kg $\pm 12\%$

An additional flutter calculation was performed. The results confirmed that the following values are acceptable:

Elevator	200 - 285 Ncm	3,10 - 4,40 kg (without mass balance)
----------	---------------	---------------------------------------



## VII. Checks

### Check Lists

Daily checks and checks before launch: See Flight Handbook IV-2.

### Checks in specific cases.

#### After a heavy landing:

Check the undercarriage mechanism under the rear seat, check the undercarriage mountings in the wheel box, check the spar and root rib for white patches in the glassfibre reinforced plastics (GFK).

Check the wing fittings in the fuselage and the pins in the root rib.

#### After a Ground loop:

Check the undercarriage mounting, check the rudder controls rods and bellcranks under the front seat.

Check the GFK tube at the base of the fin.

Check the wing fittings in the fuselage and the connecting pins in the root rib.

### VIII. Regular service (100 hours and annual inspections)

The following schedule of service should be carried out every 100 hours or at the annual inspection, which occurs first.

1. The entire glider should be checked for cracks, holes and bumps.
2. All fittings should be inspected for satisfactory condition (play scores and corrosion).
3. All metal parts should be examined for corrosion, cracks, deformation and if necessary reconditioned and freshly protected.
4. Check that there is no play in the wing and tailplane to fuselage fittings.
5. The control linkages (Bearings, stops, fittings, hinges and control cables) should be inspected and replaced if there is evidence of bending or corrosion.
6. The controls including the brakes should be submitted to a functional test and the control deflections checked.
7. If the controls do not move free throughout their range, search for the cause and correct.
8. The undercarriage should be inspected and the wheel and brake checked to be in good condition.
9. The two hooks should be treated in accordance with their appropriate maintenance manual.
10. Check the pitot for the ASI is clear and that the tubing to all instruments is in good condition and free of leaks or kinks.
11. The condition and calibration of all instruments should be checked and any other equipment inspected.
12. Equipment and instruments should be checked against the equipment list.
13. Check markings and placards.
14. After repair or change of equipment, the weight table should be updated with the new empty weight and center of Gravity by weighing or calculation.



After extended storage check accordingly to regular service pos. 1 to 11 and inspect for evidence of rodents and birdness.

## IX. Lubrication

### Ball Bearings

All bearings installed are sealed with a permanent grease filling. Greasing of bearings is therefore unnecessary.

### Sliding Bearings

All slide bearings installed on the fixed control linkages do not require servicing or greasing. However, the push rod bearings in the root rib and on the tailplane mounting should be cleaned with petrol and regreased when dirty. The pins and bushes on the wing fittings should be regreased when necessary during rigging.

The pins on the tailplane fittings and the screw thread should be lubricated periodically. The hinge and catch of the cover should be occasionally oiled. Dirty release hooks are best cleaned using a brush and compressed air whilst operating the mechanism. The belly hook is accessible from inside and can be lubricated with Sprayoil or similar.

**Maintenance on Hotellier quick-locks** must be conducted during each annual inspection or 500 hours which ever occurs first. They are installed at the control-connections of aileron and airbrakes at the wing-fuselage joint and at the elevator connection to the pushrod.

The diameter of the swivel has to be measured at different points by a micrometer with no differences in excess of 0.1 mm (0,004 in.) that means the swivel must still be spheric. If there are larger differences the swivels and the appropriate joints must be replaced.

Swivels and joints should be greased prior to each rigging.

The use of additional safety-pins guided through the holes of the wedge-type slides increases safety. (safety-pins No. 500 3771 from A. Würth, D - 7118 Künzelsau, W.-Germany or manufacturer)

**TWIN-ASTIR TRAINER Undercarriage**

## 1. Torque settings of the undercarriage attachment screws.

Torque to be applied at the side attachments:

at M 8 screws — 1,2 kpm = 8,7 lbs-ft

at M 10 screws — 2,6 kpm = 18,8 lbs-ft

## 2. Installed length of compression washer.

In order to keep to the design installed length of the compression washer, it is necessary to tighten the M 8. Hex nut at the upper mounting point of the wheel box. The correct installed length is automatically reached as a result. There are 106 compression washers.

## 3. Changing the brake shoes.


- a) Remove the wheel housing.
- b) Loosen the M 12 Allan key type screws in order to remove the brakes. The brake hose must not be taken off at the same time, otherwise it will be necessary to bleed the system.
- c) Remove the two split pins from outside and change the brake linings. The old brake linings can be used again after cleaning with steel brushes, if their dust grooves are still clearly visible.
- d) Re-install in reverse order.

## 4. Bleeding the brake system.

- a) Attach a clear plastic tube to the bleed screw, with the other end dipped in a container of brake fluid.
- b) While using the brake lever to force the fluid through the system via the brake cylinder, loosen the bleed screw.
- c) The bleeding process is completed when no more air bubbles are visible in the plastic tube.

**Note**

The brake fluid DOT 3 (amber) is available everywhere at garages. It is standardized within Europe.

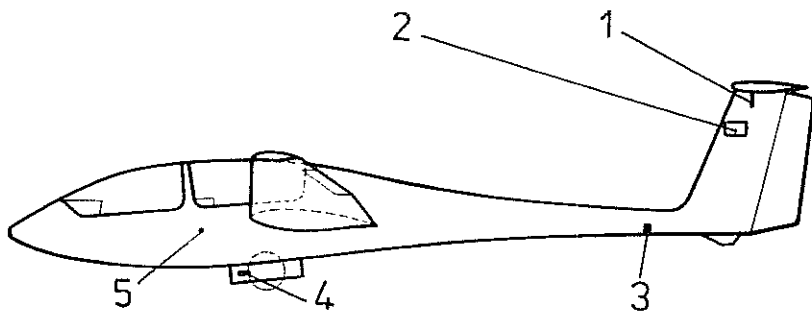
**X. Labels and Markings**

1. Marking controlling the correct rigging of the tailplane.
2. Label for the total energy tube.
3. Mark to locate the hole for the tail wheel.
4. Label for weak link strength and tyre pressure.
5. Red ring round the static hole.

ASI markings

Speed		km/h	Markierung	Bedeutung
Mph	kts			
51 - 105	44 - 92	82 - 170	Green Arc	Normal range of flying speed
105 - 155	92 - 135	170 - 250	Yellow Arc	Range of flying speeds to be used with care
155	135	250	Radial red line	Maximum speed (restored with MSB315-64/3)
64	55	102	Yellow triangle	Minimum recommended landing speed at full load

Red mark  
At 250 km/h  
(135 kts, 155 mph)

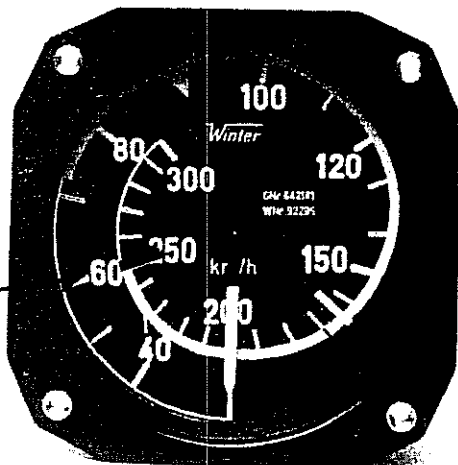

## **XI. General care**

### **Dampness**

As far as possible the glider should be protected from damp. All the metal parts of the glider, with the exception of the wing and tailplane fittings are protected against damp. However, this will not prevent corrosion during extended exposure to moisture. Following any flights in rain any water which has entered the glider should be dried up and the exterior surfaces dried with a chamois leather. Polished metal parts should be regreased. Beware of condensation.

### **Sunlight**

All structural parts of GFK glider should have white surfaces to avoid them heating up in sunlight.

### **Protection of the Finish**

The Gelcoat surface layer is very resistant and can therefore be cleaned using a mild detergent. Ingrained dirt such as grease and dead flies, are best removed with a SILICONE-FREE polish (1 Z Spezial-Reiniger or "Reinigungspolish", Fa. Lesonal, Stuttgart). Sticky tape used for sealing the wing and tailplane joints may be removed using thinners of Petrol (Beware thinners may remove the markings).

### **Cleaning the Canopy**

The canopy should only be cleaned using a soft clean cloth or sponge and a mild soap solution. It should be rinsed with clean water and dried with a chamois leather. "Plexipol" is a suitable polish. Never rub perspex with anything dry.

### **Parking**

Parking sailplanes in the open air should be avoided. The glider should only be stored or parked in well ventilated buildings.

## XI. Inspection Procedures for Increase of Service Time

The original service life was established at 3000 operating hours. Within this period the prescribed scheduled maintenance ensures airworthiness. Now, by means of special inspections, the service life can be extended step by step to 12000 operating hours:

### 1. General

Fatigue tests with wing spars proved that the service life of FRP-gliders and -motorgliders can be increased to 12000 operating hours, if the airworthiness of each aircraft can be proved again by means of a special multistage service life test programme (in addition to the mandatory periodical inspections).

### 2. Time Limits

If an aircraft has reached a service life of 3000 operating hours a detailed inspection shall be conducted according to the programme described under Item 3. If the inspection results are positive or after determined defects have been duly repaired the service life of the aircraft is increased by 3000 hours i.e. to a total of 6000 operating hours (1st stage).

The inspection programme shall be repeated at 6000 operating hours. If the results are positive and the determined defects duly repaired the service life is increased to 7000 operating hours (2nd stage).

If the glider has reached a service life of 7000 operating hours conduct the prescribed inspection programme again.


If the results are also positive and the determined defects duly repaired the service life is increased to 8000 operating hours (3rd stage).

The gradual extension of service life will be performed by steps of 1000 flight hours up to maximum 12000 flight hours at this time (4rd - 7rd stage).

Additionally at 9500, 10500, 11500 operating hours inspection of the wing connecting bolts and main spar spigots must be performed according to Service Bulletin TM 315-45, action 6.

3. In any case, ask for the latest issue of the inspection record which comprises the latest inspection results.
4. Inspections shall only be conducted by the manufacturer or an authorized repair shop.
5. The inspection results shall be entered into the inspection record provided with a comment on each means. If the inspection is conducted in an authorized repair shop a copy of the inspection record shall be forwarded to the manufacturer for information and evaluation.
6. The annual inspection according to § 27 (1) German LuftGerPO does not fall within the purview of this regulation.



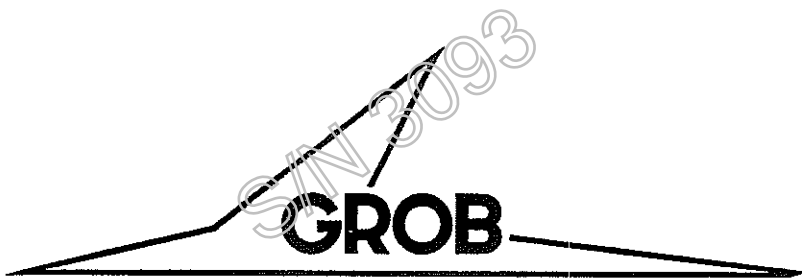

REPAIR INSTRUCTIONS  
*TWIN-ASTIR*

Manufactured by:  
Burkhard Grob Flugzeugbau  
8939 Mattsies  
Flugplatz Mindelheim-Mattsies  
West Germany

## INDEX

	Page
1 Forward	1
2 Authorized Materials and Suppliers	2
3 Simplified "Texture" plan of TWIN ASTIR	4
4 Repair of GFK material	5
5 Damage to section of GFK foam-sandwich	6
6 Damage to section of GFK Styropor-sandwich	8
7 Damage to section of GFK laminate	8
8 Paint-work	10
9 Repair of Metal Fittings	10
10 Major Repairs	11
11 Construction details of extra equipment attachment fittings	11

### 1. Forward

The Glider TWIN ASTIR is constructed from Glass-Fibre reinforced Plastic (GFK). The fuselage consist of GFK laminate. The load bearing surfaces (wings) and the Tailplane consist of GFK laminate with a foam supporting layer (GFK foam-sandwich). The Tail-fin and control surfaces consists of GFK styropor sandwich.



## 2. Authorized materials and suppliers

**Resin:** Shell Glycidäther 162 (Epikote 162)

**Hardener:** BASF Laromin C 260

Mixing: 100 parts Resin - 38 parts Hardener

Ratio by weight

### Glass Fibre Cloth

Supplier: Interglas Textil GmbH. Söflinger Str. 246, 7900 Ulm

Use	Cloth	Weight g/qm	Interglas- Nr.
Fuselage	Double Twill	161	92 110
	Double Twill	390	92 140
	Chain Reinforced	433	92 146
Wings	Double Twill	161	92 110
	Double Twill	276	92 125
	Chain Reinforced	433	92 146
Elevator, Rudder and Ailerons	Double Twill	276	92 125
	Double Twill	161	92 110

All Glass-Fibre cloth is Alcholine free. E Glass with Votan-A-Finish or Finish I.550.

### Rovings:

EC 10-80-2400 K 43

Supplier:

Gevetex  
4000 Düsseldorf  
Postfach 1205

### Foam Material

PVC-Hartschaum  
Conticell 60  
8 and 8 mm large  
Spec. Weight 60 kg/m<sup>3</sup>

Continental AG  
3000 Hannover

**Styropor:**

Thermopete  
4 mm large  
Spec. Weight 15 kg/m<sup>3</sup>

Poron-Werke GmbH  
6122 Erbach  
Brunnenstraße 5

**Depron**

3 mm large  
Spec. Weight 15 kg/m<sup>3</sup>

Firma Kalle  
6202 Wiesbaden/Bibrich

**Filling Material for Resin**

Microballoons Brown

Lackfabrik Bäder KG  
7300 Eßlingen  
Schließfach 25

Cotton Flock  
Type FL 1 f

Schwarzwälder Textil-Werke  
7623 Schenkenzell  
Postfach 12

**Paint**

PE-Schwabbelack  
White. No. 03-69120  
UP-Hardener No. 07-20510  
100 Schwabbelack Paint (Gel-Coat)  
3 Hardener mix ratio by Weight.  
Thinners No. 06-30260

Lesonal-Werke  
7000 Stuttgart 30  
Postfach 30 07 09

**Red Paint**

Nitro-Cellulose-Kombilack  
Blood-Orange RAL 2002

Lackfabrik Bäder KG  
7300 Eßlingen  
Schließfach 25

### 3. Simplified "Texture" plan of TWIN ASTIR


Reinforced regions for special loads and stress conducting are not shown.

#### 1. Flügel

Außenlaminat  
1 Lage 92 110 längs  
1 Lage 92 125 längs  
Kern  
Conticell 60 8 mm  
Innenlaminat  
1 Lage 92 125 diagonal

#### Wing

Outer laminate  
1 Layer 92 110 lengths  
1 Layer 92 125 lengths  
Core  
Conticell 60 8 mm  
Inner laminate  
1 Layer 92 125 diagonal

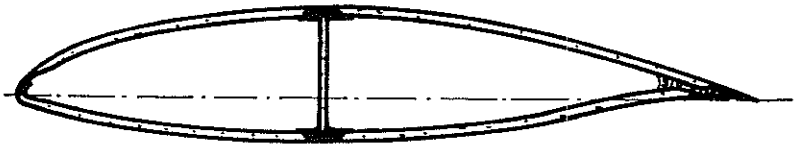

#### 2. Rumpf

Von außen nach innen  
1 Lage 92 110 längs  
1 Lage 92 146 längs  
3 Lagen 92 140 diagonal

#### Fuselage

From outside to inside  
1 Layer 92 110 lengths  
1 Layer 92 146 lengths  
3 Layers 92 140 diagonal



**3. Ruder**


Höhenruder oben  
Querruder oben  
Seitenruder rechts und links

1 Lage 92 110 diagonal  
1 Lage 92 125 diagonal  
Kern Depron 3 mm  
1 Lage 92 110 diagonal

**Controls**

Elevator above  
Aileron above  
Rudder left and right

1 Layer 92 110 diagonal  
1 Layer 92 125 diagonal  
Core Depron 3 mm  
1 Layer 92 110 diagonal



Höhenruder unten  
Querruder unten  
2 Lagen 92 125 diagonal

Elevator below  
Aileron below  
2 Layers 92 125 diagonal

**4. Höhenflosse**

2 Lagen 92 110 diagonal  
Kern: Conticell 60 6 mm  
1 Lage 92 110 diagonal

**Fin**

2 Layers 92 110 diagonal  
Core: Conticell 60 6 mm  
1 Layer 92 110 diagonal



#### 4. Repair of GFK material

If the glider is damaged, first examine the outer surface very carefully, frequently other structural parts are involved, fractures can run unseen under the outer surface.

Carry-out repairs with extreme care. As the outer surface of GFK gliders is stressed (loading bearing), failure of this skin can lead to structural failure.

Keep to the Resin-Hardening mixing ratio exactly = 0.5% using a clean mixing pot. The ratio of Glass fibre – to Resin mix is approximately 1 to 1. Grind or splice the repair, before laying damp laminate on it, so that dirt cannot penetrate and stop safe adhesion.

As in plywood, the direction of the fibre glass cloth lay (length or diagonal) is of extreme importance to its strength. It is necessary to know approximately how many fibre and their direction in the damaged part with reference to the simplified texture plan, so it may be restored to the correct wall strength. If a small piece of the damaged laminate is broken off and burnt, the remaining glass-fibres can be counted and identified.

Splicing and grinding are time consuming, to save trouble, grind only as much away as necessary, only to the size of the cloth patch. When it is necessary to shorten the repair time it may be done with a hot air blower to speed the resin hardening time.

**Warning.** A too high temperature will produce large air bubbles in the cloth. A tent can be built out of foil, through which hot air can be guided, and thereby avoiding local overheating. In making repairs to control surfaces, be careful not to increase their weight as there is danger of reating flutter conditions.

#### 5. Damage to section GFK Foam-Sandwich (GFK Hard-Foam-Sandwich)

It can appear that only the outer surface (the outside laminate) is damaged but it can also happen that the whole skin (outside and inside hard foam laminate) is destroyed.

##### a) Important

With a split or fracture, the laminate can become detached from the supporting foam. Start by removing loose laminate until firm laminate is reached. To remove the foam laminate use a grinding disk, grinding block or sharp knife. With a grinding block or sharp knife only remove the cloth around the damage. Splice ratio per cloth covering approximately 20 mm ratio laminate thicknes to splice: approximately 1:50.

After grinding out the splice, the repair must be thoroughly cleaned. Remove the dirt (also out of the foam pores) with compressed air. Wash the splice with carbon tetrachloride or Acetone, in case it has been contaminated with dirt or grease.

Fill up the pores of the foam with Resin and Microballoons until it is smooth. Then join the laminates with the correct cloth, laying it in the right direction.

Repairs must be dirt and grease free. (Figure 1)

At room temperature the resin will harden in about 8 hours.

The repair can now be ground smooth and be painted.

**Warning:** Grind only to the edge of the repair.

## b) Damage to the whole of the Sandwich

When the inner laminate is destroyed, so there is no binding with the foam, widen the hole so far as foam material is secure, then it is possible to repair the inner laminate. A edge of at least 20 mm must be obtained (retaining laminates thickness : splice ratio approximately 1:50).

The inner laminate must be carefully ground and cleaned.

The outer laminate is repaired as described in section a). (Figure 2)

With „minor“ damage a piece of thin plywood support can be glued with Pattex from within on the inner skin, the cloth patch of the inner laminate can then be layed in and the hole filled with resin and Microballoons mixed with Styroporballs. When hardened (ca. 8 hours room temperature) the outer surface can be ground smooth and the outer cloth put on.

The plywood support should remain as part of the repair. When the hole is of large or of long size the plywood support should be held in place with thin nails which can be removed later, by pushing them out from the top surface.

**Warning:** The plywood support must be well jointed to avoid wrinkles in the cloth. (Figure 3)

With large holes in the sandwich, the weight of the Microballoons filler must be considered. A piece of Conticell hard foam is made before-hand, which exactly fits into the existing hole. The inside pores are closed with resin and Microballoons and laid on the inner cloth to harden, until the foam is just bendable (evtl. hot air). Then the foam with

enthickened resin (cotton flock-Microballoons) can be glued in the hole. Microballoons are used to close the outside pores, the repair is then ground and the outside cloth is then laid on.

## 6. Damage to section of GFK Styropor-Sandwich

Repair of Styropor damage of section.

The Styropor has a closed upper surface, the cloth is held with pure or lightly thickened resin. Splits in the upper surface pores can be filled. With large damage put a patch inside and allow to harden first before working further. This will stop the structure wrinkling.

**Warning:** Do not use strong heat to speed up hardening time, or Styropor will develop blisters and the repair must be done again.

## 7. Damage to section of GFK Laminate

Repairs to GFK laminate are simple. Splice the laminate around the hole, lay the cloth in layers on (largest patch first) and after 2–3 hours, when the resin has partially hardened smooth over with resin and Microballoons. Splice length pro cloth layer ca. 20 mm. Retaining laminate thickness : Splice ratio 1:50. In case the splice is dirty it can be cleaned with Carbon Tetrochloride or Acetone.

With large damage a under laying support (plywood) should be used. Wet laminate should not bridge a gap of more than 20 mm unsupported. The plywood support can be held in place with Pattex glue and nails (e. g. metal fitting in fuselage) which can be removed afterwards. (Figure 4).

## 8. Paint-work


As soon as the laminate of the repaired section is hard, it can be rough ground with (80 grit) sandpaper. Large unevenness must be filled and smoothed with white polyester filler. Then with fine dry-grinding paper (150 grit) until a moderately smooth outer surface is produced. Before painting, the repaired section must be perfectly cleaned from grinding dust, separated mediums and other foreign bodies.

For successful painting, with Gel-Coat (Schwabbellack + hardener) a not too large brush should be used, putting on several thin coats, until the laminate can no longer be seen.

The first coat should be allowed to harden and then ground with

1 Lage 92 110  
1 Layer 92 110

1 Lage 92 125  
1 Layer 92 125



Kern  
Core  
Conticell 60

Microballoons

Abb. 1  
Fig. 1

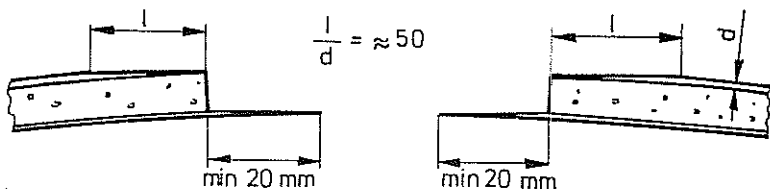


Abb. 2  
Fig. 2

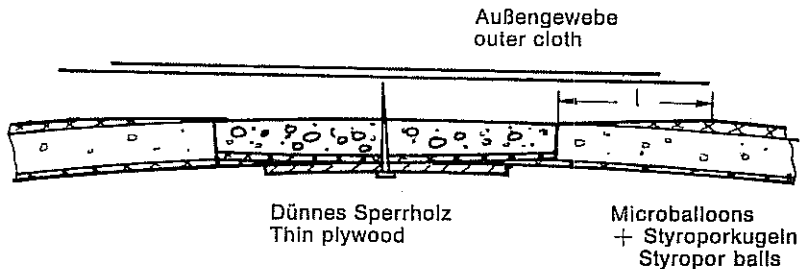


Abb. 3  
Fig. 3

Rumpfschale  
Fuselage skin

1 Lage 92 146  
1 Layer 92 146

1 Lage 92 110  
1 Layer 92 110

3 Lagen 92 140  
3 Layers 92 140

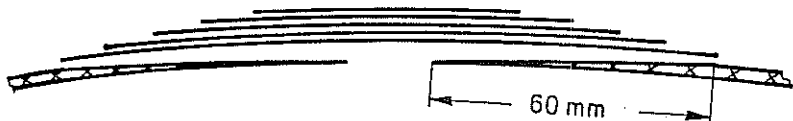


Abb. 4  
Fig. 4



(360 grit wet paper) additional coats should then be added and likewise ground.

The final finish should be carried out with 600 grit or 800 grit Wet and Dry grinding paper and then polished with a silicon-free car polish or with hard-wax, using a polishing machine.

## 9. Repair of Metal Fittings

### a) Damage to Steel Fittings

Repair of damage to fittings made of steel should only be accomplished after approved procedures are obtained from the manufacturer.

Welded steel fitting (push rods) out of 1.7734.4 or 1.0308.1 (St. 35.4). Welding only to be carried out with WIG Welding method (Wolfram-Inert-Gasschmelzschweißung) and with welding material 1.7734.2 (for 1.7734.4) and 1.7324.0 (for 1.0308.0 or combination of 1.7734.4 and 1.0308.1)

### b) Damage to Aluminium Castings

Repair of Aluminium castings 3.2374.6 (GALS:7 Mgwa) cannot be carried out. Fractured or bent Aluminium castings must be replaced by new ones.

**Warning:** Bent or chipped Aluminium castings are **not** under any circumstances to be straightened.

### c) Main Wing and Fuselage fittings

The main fitting between wing and fuselage (4x in the fuselage) 7 steel balls ( $\varnothing$  6 mm) have contained in each fitting. The balls are forced by a sliding cover through the lock shell into a groove in the moveable lateral axis force bolts in the spar caps thus securing the wings.

Faults of one or more balls, the connecting fitting should be changed.

## 10. Major repairs

Major repairs are only to be carried out by the manufacturer or by an agent (who has the authorization of the manufacturer.).

Major repairs are:

- **Broken** off wing, fuselage, tailplane, control surface, spar stumps (spar caps)
- **Ripped or torn-out** - Main fittings (in fuselage  $\varnothing$  55 x 3, Fitting of the tailplane in fin. In the wing, aileron securing both  $\varnothing$  24 mm, joining bearing GE 25. Spar cap bolts  $\varnothing$  25 mm).
- Destruction of main rib (vertical frame)
- Damage to the GFK laminate (tear, splits, cracks immediately near the main fittings).

### 11. Construction details of extra equipment attachment fittings

The fittings for the oxygen bottles are built in as standard on the right side of the luggage compartment. Bearing stands and quick action lock can be obtained from the manufacturer.

Other fitting points can be installed by the owner. (Figure 5)

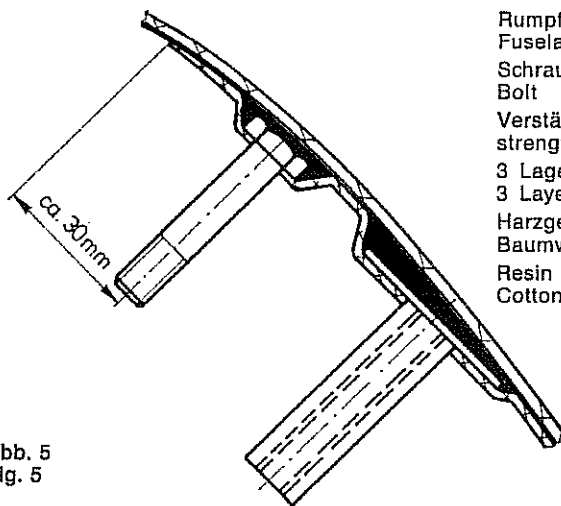


Abb. 5  
Fig. 5

Rumpfschale  
Fuselage skin

Schraube  
Bolt

Verstärkung 2 Lagen 92 140  
strengthening 2 Layers 92 140

3 Lagen 92 140

3 Layers 92 140

Harzgemisch mit  
Baumwollflocken

Resin mixed with  
Cotton Flock

The fitting must be made as shown in the drawing so as to take the weight of the additional equipment. Fittings made in this manner must stand a load 10 g without failure.

When additional equipment is fitted the glider must be re-weighed to see whether the C of G is within the permitted limits.

Blueprints for the installation of radio and oxygen equipment are obtainable from the manufacture.